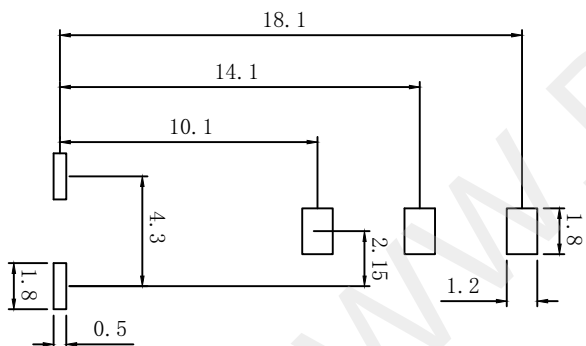
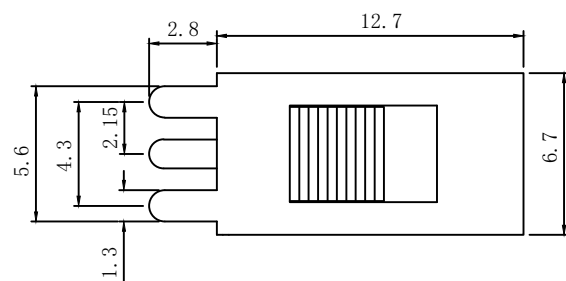
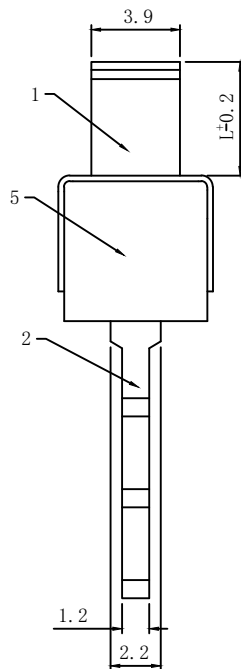
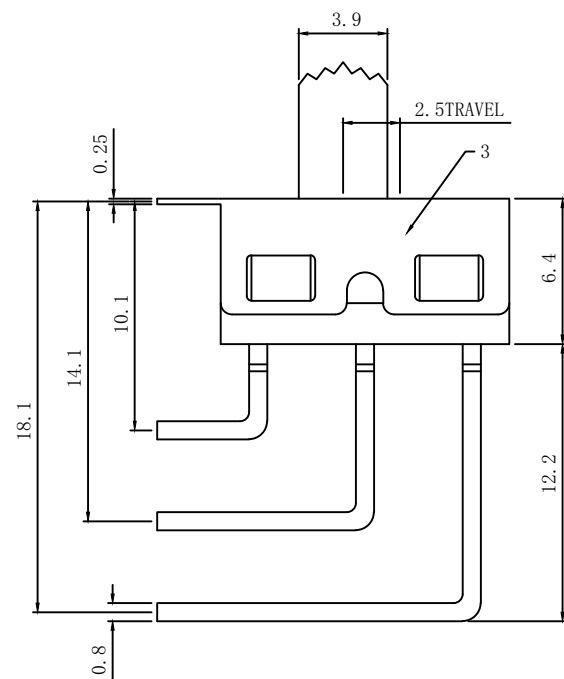


SCHEMATIC

L=

2

3

4

5

6

7

8

9

10

电气性能参数:

1. 额定负载: AC125V 1.5A
2. 接触电阻: 100毫欧以下
3. 绝缘电阻: 100兆欧以上
4. 耐压: AC 500V
5. 力度: 350 ± 100 gf
6. 寿命: 3000次
7. 波峰焊: 255 ± 5 度

7	钢珠	碳钢	1	原色
6	弹簧	碳钢线	1	原色
5	胶身	P P A	1	红色
4	码片	黄铜带	1	镀银
3	铁壳	不锈钢	1	原色
2	端子脚	黄铜带	3	镀银
1	胶柄	P P A	1	红色
NO.	物料组成	材质	数量	表面处理



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 拨动开关	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-SS-12D09-XXX
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2601141130
			SHEET NO.	1 OF 1