

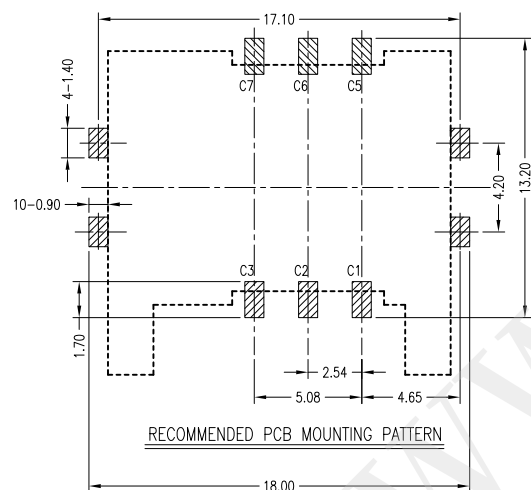

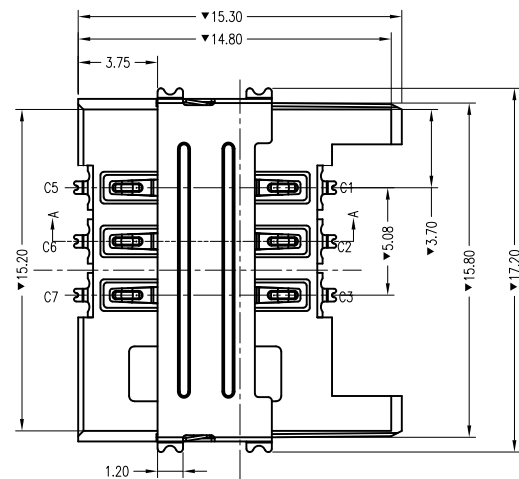
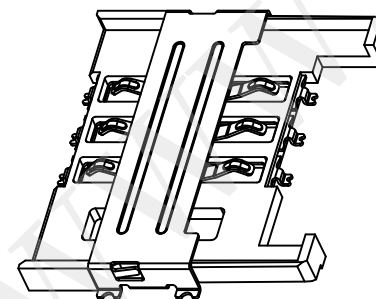


SECTION A-A

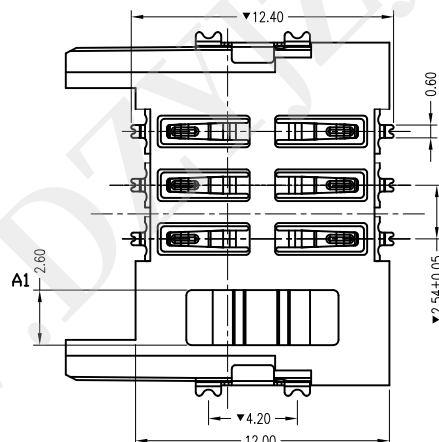

RECOMMENDED PCB MOUNTING PATTERN

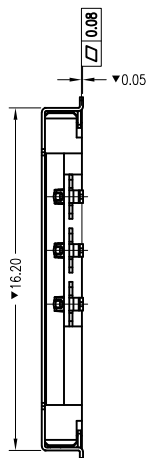

NOTES:

1. MATERIAL:

- 1). HOUSING MATERIAL: THERMOPLASTIC UL94V-0; COLOR: BLACK
- 2). CONTACT MATERIAL: COPPER ALLOY
- 3). SHELL MATERIAL: STAINLESS STEEL

2. FINISH:

- 1). CONTACT FINISH: 50u" MIN. NICKEL UNDER PLATED, PLATED 3u" Au ON CONTACT AREA; PLATED GOLD FLASH ON SOLDER AREA.

3. ELECTRICAL SPECIFICATIONS:

- 1). VOLTAGE RATING: 12 VAC
- 2). CURRENT: 1 AMPERES MAX. PER CONTACT
- 3). OPERATION TEMPERATURE RANGE: -25°C ~ +70°C
- 4). CONTACT RESISTANCE: 60mΩ MAX.
- 5). INSULATION RESISTANCE: 1000MΩ MIN.
- 6). DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- 7). MAX. PROCESSING TEMP: 260°C for 30 SECONDS



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM 6PIN 连桥带档外焊脚1.9H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC383-SIM06-190
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2601131149
			SHEET NO. 1 OF 1