


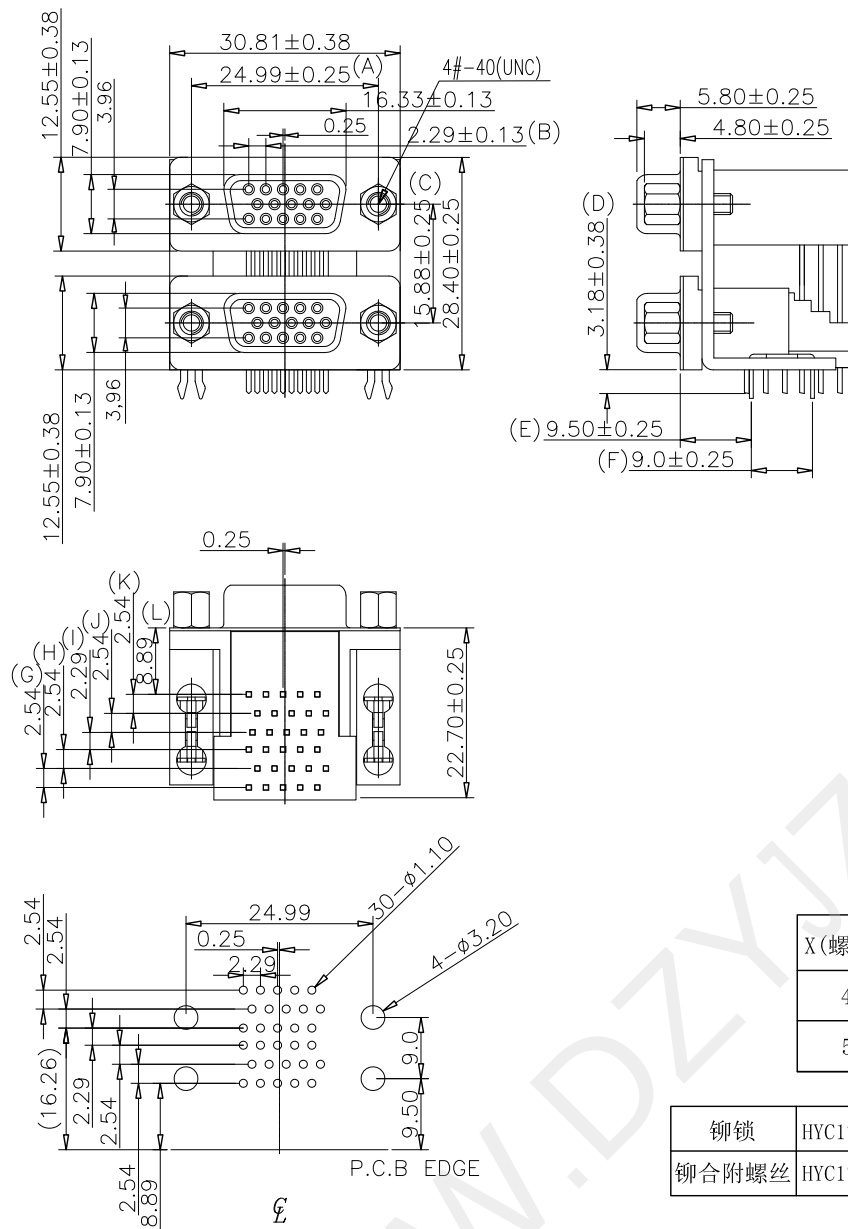

X(螺丝尺寸)

4.80

5.80

铆锁

HYC177-VGA30B-158-X

铆合附螺丝

HYC177-VGA30B-158-F-X

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance:5000 Megohms Minimum.at DC 500V.

Contact Resistance:25 Milliohms Maximum.

Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.

Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.

Insulator: PBT Or High Temperature Plastic

UL 94V-0 Rated.

Shell:Cold Roller Steel.

Screw:Steel.

FINISHES:

Contact:Gold Flash Or Full Gold.


Shell:Tin Or Nickel Plated.

Screw:Nickel Plated.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$ 

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

HDR15F对HDR15F 间距15.88

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC177-VGA30B-158

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

SEE TABLE

SHEET NO.

1 OF 1