
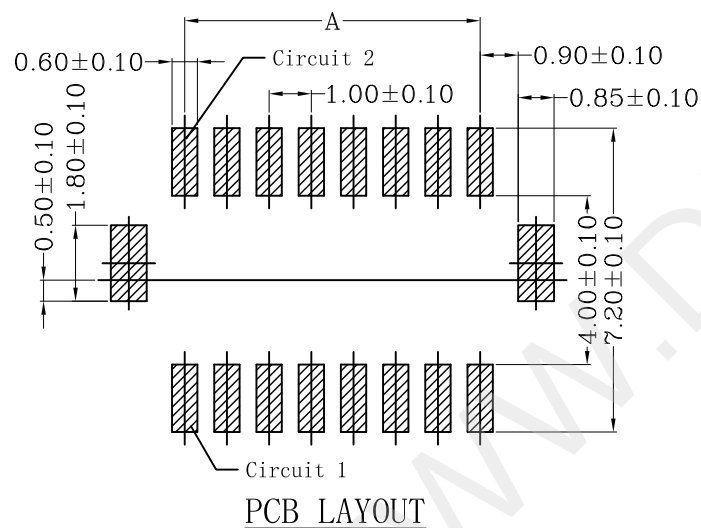
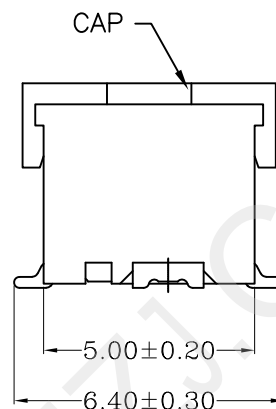



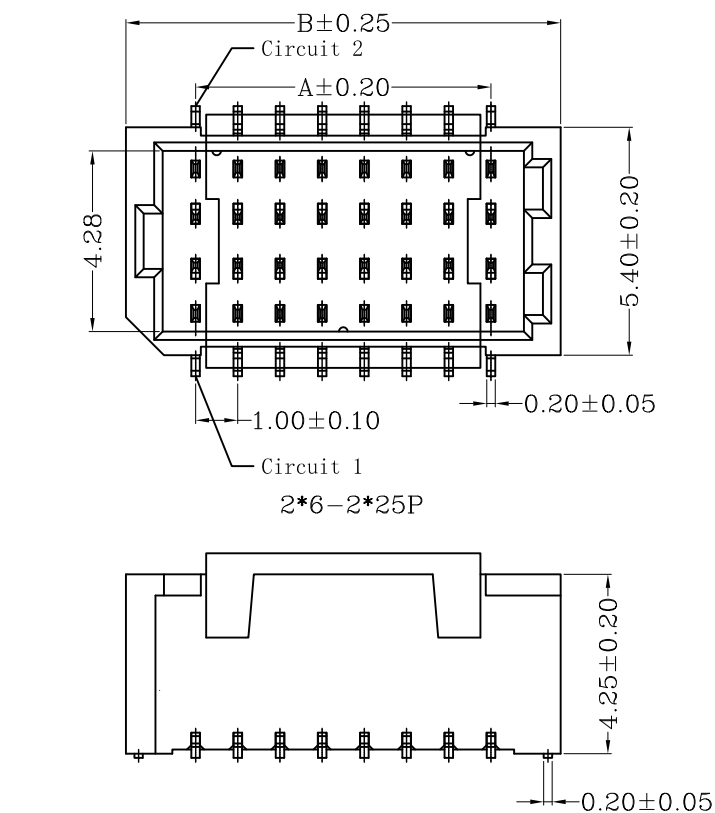

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
2X05P	4.00	7.30
2X06P	5.00	8.30
2X08P	7.00	10.30
2X09P	8.00	11.30
2X10P	9.00	12.30
2X11P	10.00	13.30
2X15P	14.00	17.30
2X20P	19.00	22.30
2X25P	24.00	27.30

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Gold-flash
Solder Tabs: Phosphor Bronze/Gold-flash
Material: LCP, UL94V-0
Color: Natural(Beige)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.0PH 线对板插座 立贴
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC68-LF2XN-100
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2601300944
			SHEET NO. 1 OF 1