

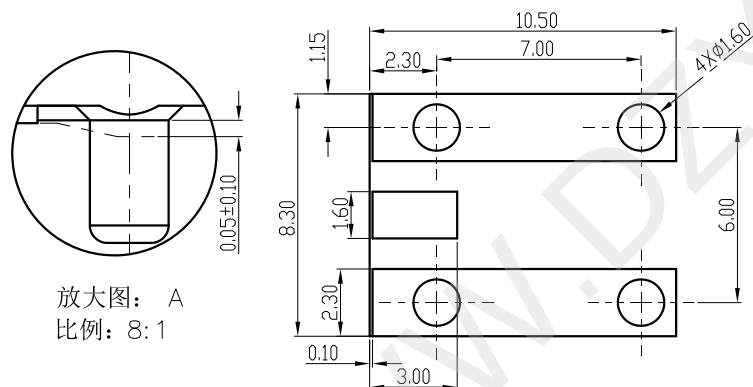
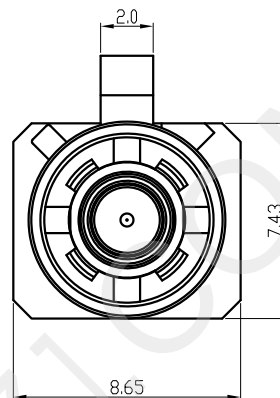
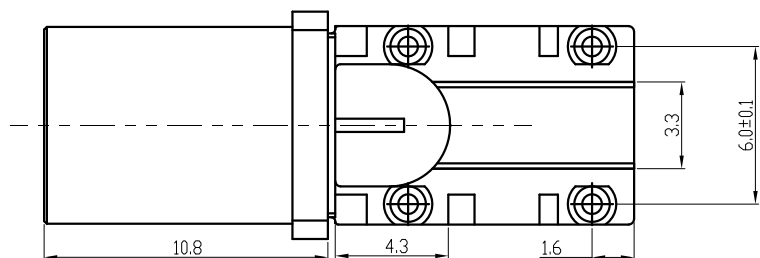


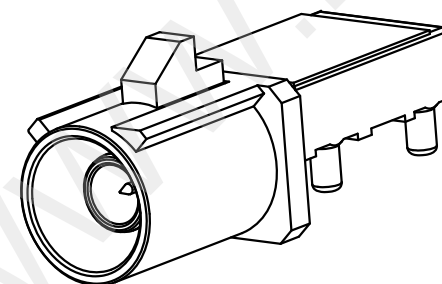

放大图: A
比例: 8:1

PERFORMANCE:


- 1: CONTACT RESISTANCE: INITIAL VALUE 50mOHM Max,
- 2: FREQUENCY RANGE:DC to 6GHz
- 3 VSWR: 0-6GHz 1.60Max
- 4 VOLTAGE RATING: 50V (AC/DC).
- 5: CURRENT RATING: 1A/PIN.
- 6: INSULATION RESISTANCE: 1000MOHM Min.
- 7: MATING CYCLES: 25 TIMES Min.
- 8: OPERATING TEMPERATURE: -40℃~+105℃

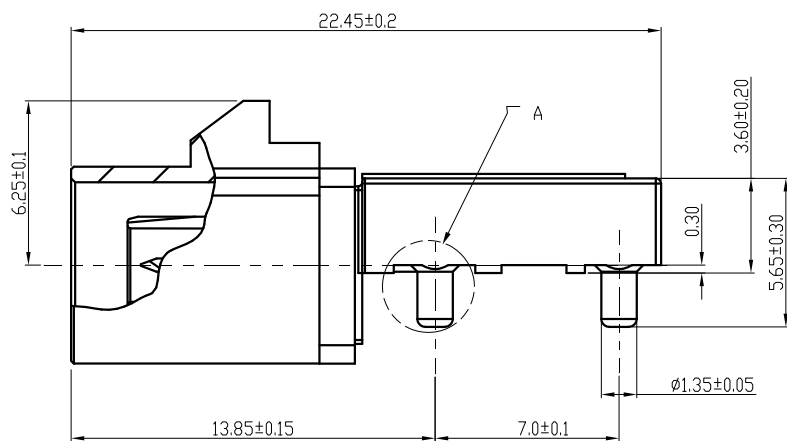

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: FAKRA 沉板式	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. MOLD NO.	HYC-703A0-82X
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2602041502
			SHEET NO.	1 OF 1

HYC-703A0-820 A TYPE BLACK/9005	HYC-703A0-821 B TYPE CREAM 9001	HYC-703A0-822 C TYPE SIGNAL BLUE5005	HYC-703A0-823 D TYPE CLARET VIOLET/4004	HYC-703A0-824 E TYPE LEAF GREEN/6002	HYC-703A0-825 F TYPE NUT BROWN/8011	HYC-703A0-826 G TYPE BLUE GREY/7031	HYC-703A0-827 H TYPE HEATHEA VIOLET/4003	HYC-703A0-828 I TYPE BEIGE/1001	HYC-703A0-829 K TYPE CURRY/1027
HYC-703A0-82A L TYPE CARMINE RED/3002	HYC-703A0-82B M TYPE PASTEL ORANGE/2003	HYC-703A0-82C N TYPE PASTEL GREEN/6019	HYC-703A0-82D Z TYPE WATER BLUE/5021						

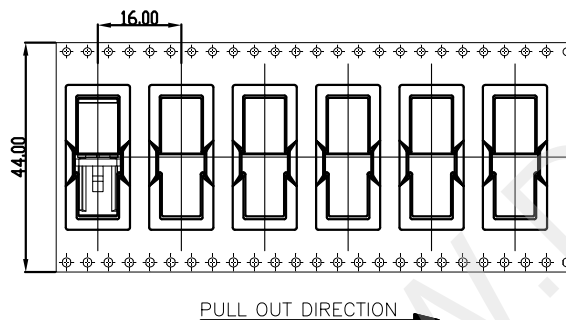

NOTE:
1.PER REEL: 400PCS



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: FAKRA 沉板式	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-703A0-82X
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2602041502
			SHEET NO.	1 OF 1