


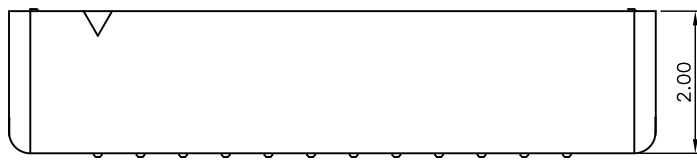
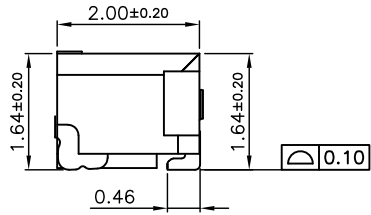
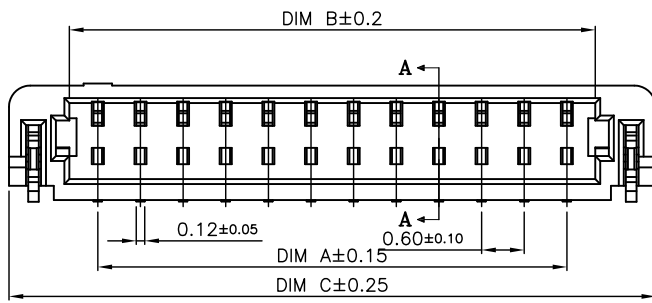


序号	品名	材质
①	0.6-卧式胶芯	LCP UL94V-0 黑色
②	0.6-卧式端子	铜合金/表面镀锡
③	0.6-卧式焊片	铜合金/表面镀锡

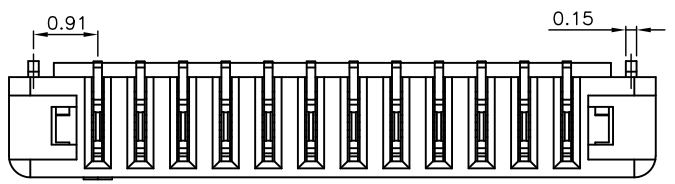


SECTION A-A

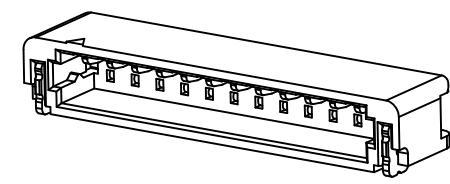


CKT	DIM A	DIM B	DIM C
2	0.60	1.40	3.10
3	1.20	2.00	3.70
4	1.80	2.60	4.30
5	2.40	3.20	4.90
6	3.00	3.80	5.50
7	3.60	4.40	6.10
8	4.20	5.00	6.70
9	4.80	5.60	7.30
10	5.40	6.20	7.90
11	6.00	6.80	8.50
12	6.60	7.40	9.10
13	7.20	8.00	9.70
14	7.80	8.60	10.30
15	8.40	9.20	10.90
16	9.00	9.80	11.50
17	9.60	10.40	12.10
18	10.20	11.00	12.70
19	10.80	11.60	13.30
20	11.40	12.20	13.90
21	12.00	12.80	14.50
22	12.60	13.40	15.10

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 30V, AC/DC.
4. 耐电压: 200V, AC/minute.
5. 接触电阻: ≤0.02Ω.
6. 绝缘电阻: ≥100MΩ.
7. 额定电流: 0.5A AC/DC.

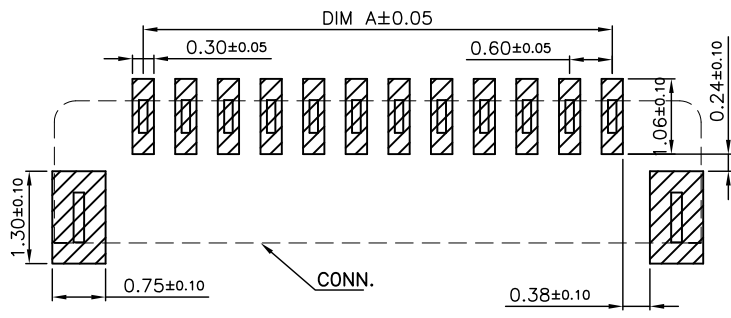

P. C. B Layout



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 0.6PH 卧贴WAFER
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC290-WFN-060
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2603111009
			SHEET NO. 1 OF 1