

说明:

1. 材质:

胶芯:LCP, UL94V-0; COLOR; BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

1) 电压: 150V AC RMS.

2) 额定电流: 1.5A.





3) 接触电阻: 40mΩ Max.

4) 绝缘电阻: 500MΩ MIN.


5) 绝缘耐压: 1000V AC.

6) 工作温度: -40° C TO +80° C.

7) 耐久性: 500 Mating Cycles MIN.

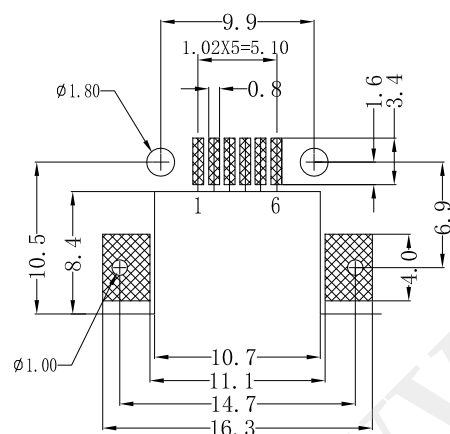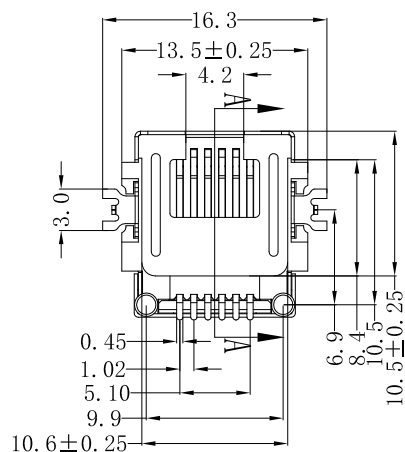

P.C.B. Layout (TOP VIEW) t=1



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RJ11 6P6C 沉板8.6 全包	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC70-RJ11-086	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2604151627	SHEET NO. 1 OF 1