

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 52A
2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6KV
Rate voltage(V)	600V
Rate current(A)	57A




NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.16mm, Poles : N=02~08P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm					
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	0.1/0.125 

5.RoHS Compliance

3	Nut	SPCC	Zn Plated
2	Pin header	Copper alloy	Au Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

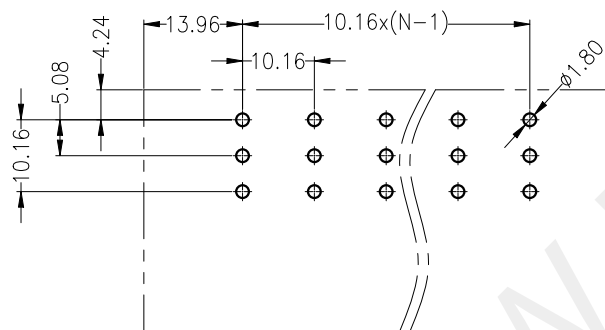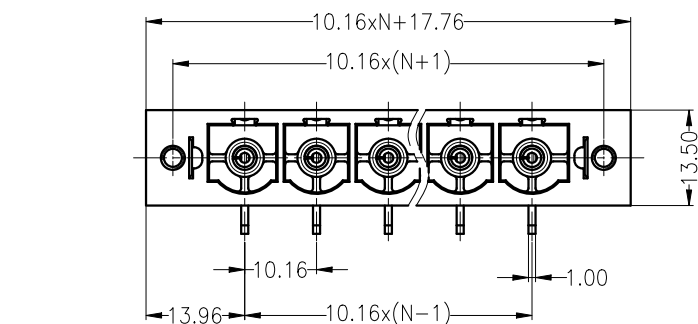

PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	插拔式接线端子 10.16PH 弯针带耳	
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2* X.X* ±0.5*		CHECKED BY:	DATE :	PART NO.	HYC213-JXD3XN-1016
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1