


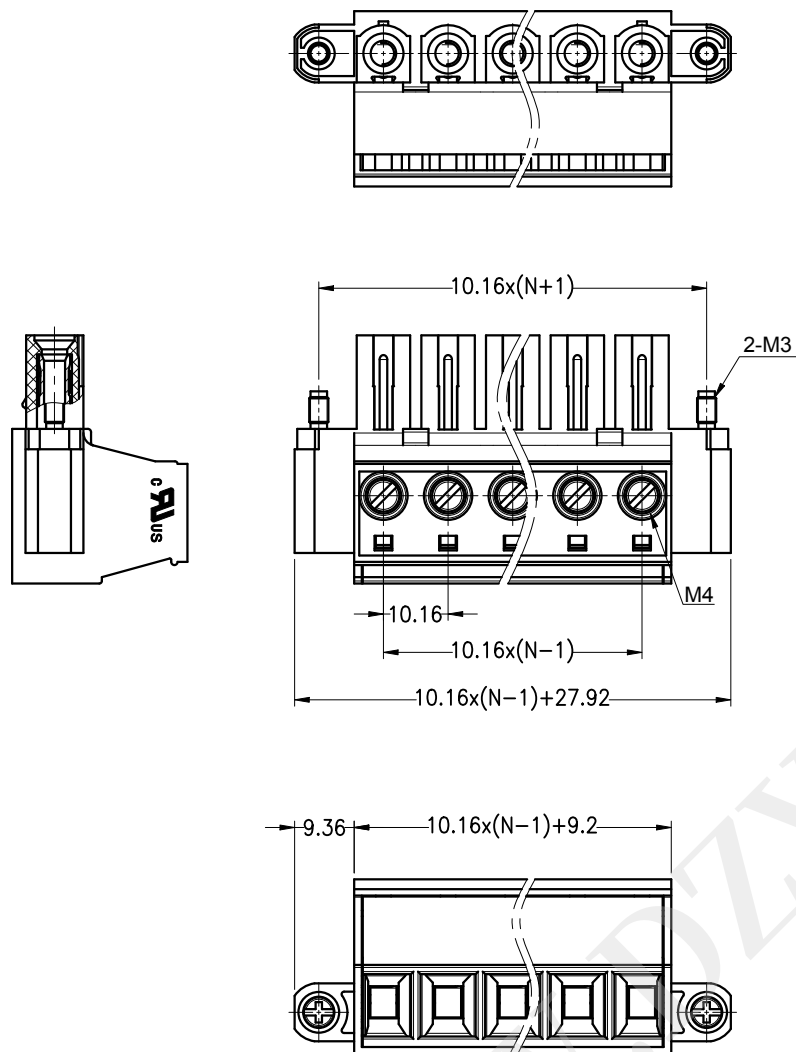

NOTES1:

UL Standard

1. Rated voltage/current : 600V / 52A
2. Withstanding voltage : AC2200V/1Min.
3. Torque value : M4 , 10.53Lb.in
4. Wire range : 20~6AWG

IEC Standard

1.

Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6KV
Rate voltage(V)	600V
Rate current(A)	57A
2. Torque value : M4 , 1.2N·m
3. Wire range : 0.5~10mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.16mm, Poles : N=02~08P
3. Stripping length : 10~11mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						
To	Over	To	To	Over	Over	Over	Over		
6	6	10	30	30	60	100	150	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

6.RoHS Compliance



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 插拔式接线端子 10.16PH 弯头带耳
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC212-JDXX-1016
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. /
			DRAW NO: HYC-2604170946
			SHEET NO. 1 OF 1