
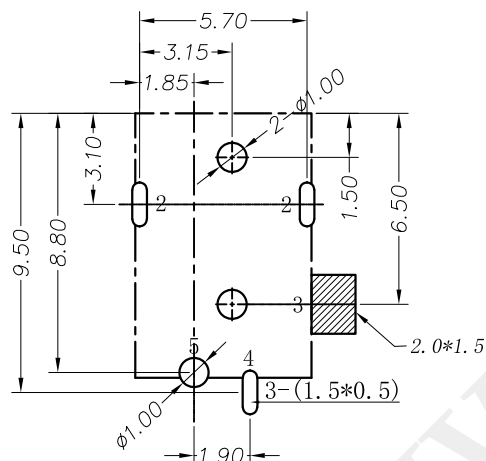
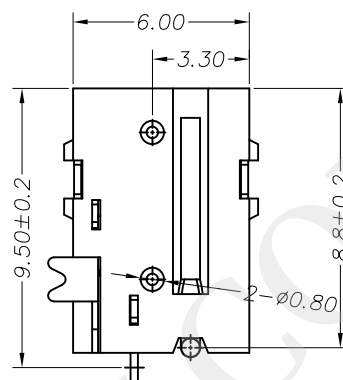

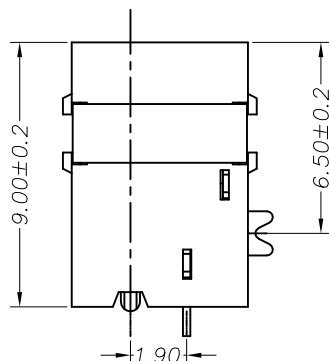




SCHEMATIC

主要技术性能

额定电负荷	DC 30V\1A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐 压	AC500V (50Hz) /min
插 拔 力	3-30N
使用温度范围	-30~70℃
使用寿命	5000次

5	DC-056-05	圆针	1	黄 铜		镀银
4	DC-056-04	插片	1	黄 铜	0.25T	镀金
3	DC-056-03	弹片	1	锰 钢	0.20T	镀金
2	DC-056-02	盖脚	1	黄 铜	0.25T	镀银
1	DC-056-01	基座	1	PPA(黑色)		
序号	产品编号	产品名称	数量	材 料	规 格	电镀

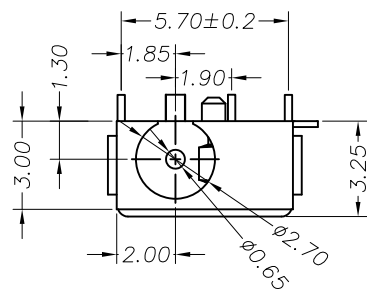

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-056D	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-DC056D-065
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2605150929
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1