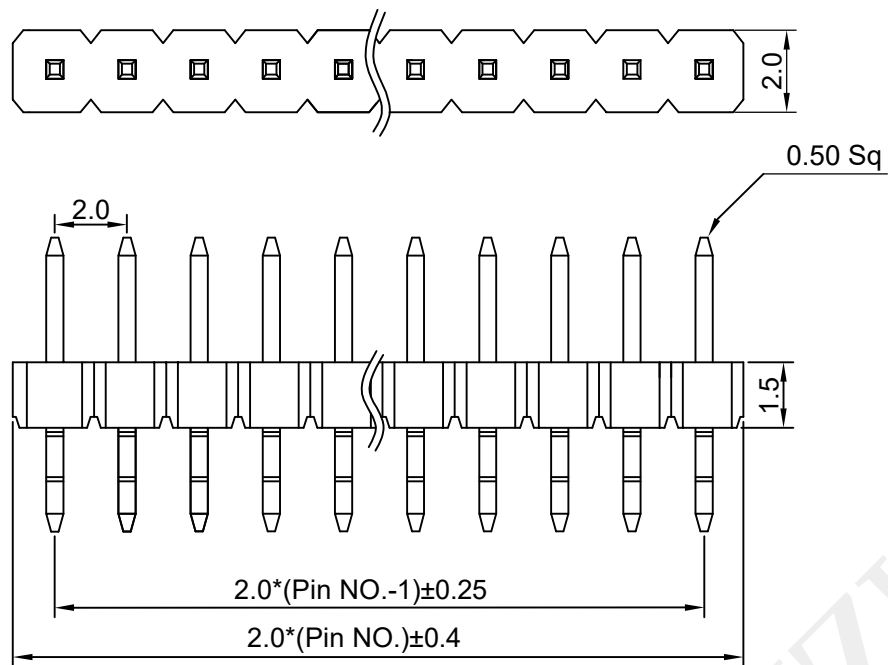


P.C.B LAYOUT

Notes:

Rated current:2.0A

Withstand Voltage:500V AC/DC

Contact Resistance:20MΩ Max

Insulation Resistance:1000MΩ Min

Operating Temperature:-40℃ TO +105℃

Contact Material:Brass

Insulator Material: PA6T UL94V-0 BK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

2.0PH 1xNpin 卧贴SMT

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC4-M200-1XX-850

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2605201151

SHEET NO.

1 OF 1