
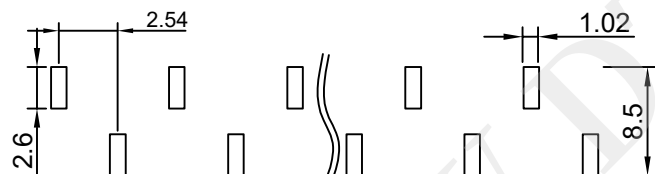
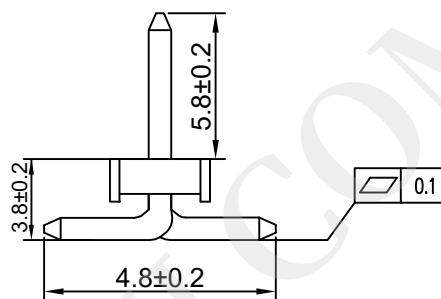


TYPE-A(正脚位)

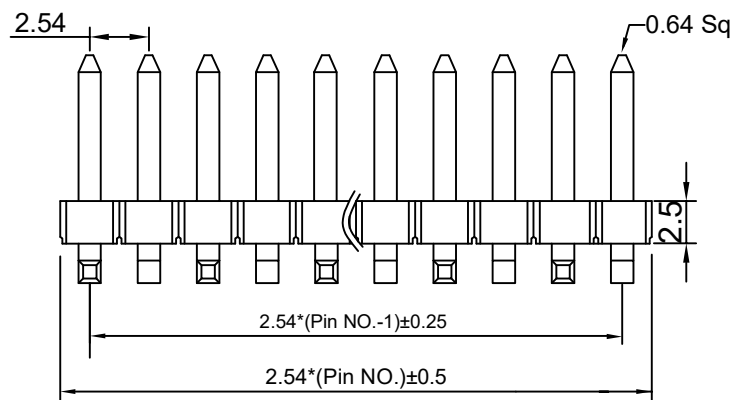

P.C.B LAYOUT

Notes:

Rated current:3.0A

Withstand Voltage:500V AC/DC

Contact Resistance:20MΩ Max

Insulation Resistance:1000MΩ Min

temperature tolerance:260±5℃

Operating Temperature:-40℃ TO +105℃

Contact Material:Brass

Insulator Material: PA6T UL94V-0 BK



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 2.54PH 2.5H 1XNpin SMT 正脚位	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC2-25M254-1XXA-960	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2605201157	SHEET NO. 1 OF 1