



- NOTE:
- MATERIAL:
 - INSULATOR:ENGINEERING THERMOPLASTIC, DARK-GREY
 - CONTACT : COPPER ALLOY C2680-H T=0.20MM
 - SHELL:C2680 T=0.40
 - PLATING:
 - CONTACT: 1U" GOLD PLATED SMT AREA OR 15U"CONTACT AREA 50u" Min. NICKEL UNDER-PLATED
 - SHELL:50u" Min. NICKEL PLATED OVERALL
 - CHARACTERISTICS:
 - ELECTRICAL CHARACTERISTICS;
 - CONTACT RESISTANCE:30mΩ MAXIMUM
 - CONTACT CURRENT RATING:0.5A
 - DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS MIN
 - OPERATING TEMPERATURE:-25°C ~ +85°C
 - MECHANICAL:
 - MATING FORCE: 4.5Kg.Max.
 - UNMATING FORCE: 1.0-4.0Kg.

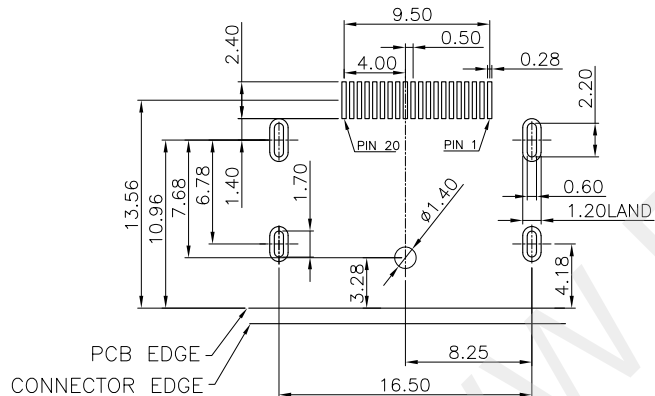

RECOMMENDED P.C.B. LAYOUT (T=1.6)

TOLERANCE : ±0.05mm



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DP SMT 有耳 螺丝孔9.13		
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.: HYC59-DP20-913	MOLD NO.:	
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO.: HYC-2606091702	SHEET NO.: 1 OF 1	
SCALE: 1:1 SIZE: A4					