

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
THICKNESS 1.60mm(TOLERANCE:±0.05)

NOTE:

A. MATERIAL:

1. HOUSING: PA9T COLOR:SEE PART NO.
2. COVER: PA9T COLOR:SEE PART NO.
3. CONTACT: C2680 T=0.20
4. SHELL: SUS304 T=0.25
5. MIDDLE SPRING: SUS201 T=0.20

B. PLATING:

1. CONTACT: GOLD PLATED AT CONTACT AREA
TIN(80u"MIN) PLATED AT SOLDER

AREA



NICKEL(30u"MIN) PLATED OVERALL

2. SHELL: NICKEL(40u"MIN) PLATED
- C. MATING FORCE: 3.5KGF(35N)MAX.
UNMATING FORCE: 1.0KGF(10N)MIN.
DURABILITY: 5000 CYCLES
- D. SALT SPRAY 24HR PASS



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB 3.0(下TYPE C空位)鱼叉脚间距8.0 90度DIP卷边
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC190-USBA09-080 MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2606161438 SHEET NO. 1 OF 1

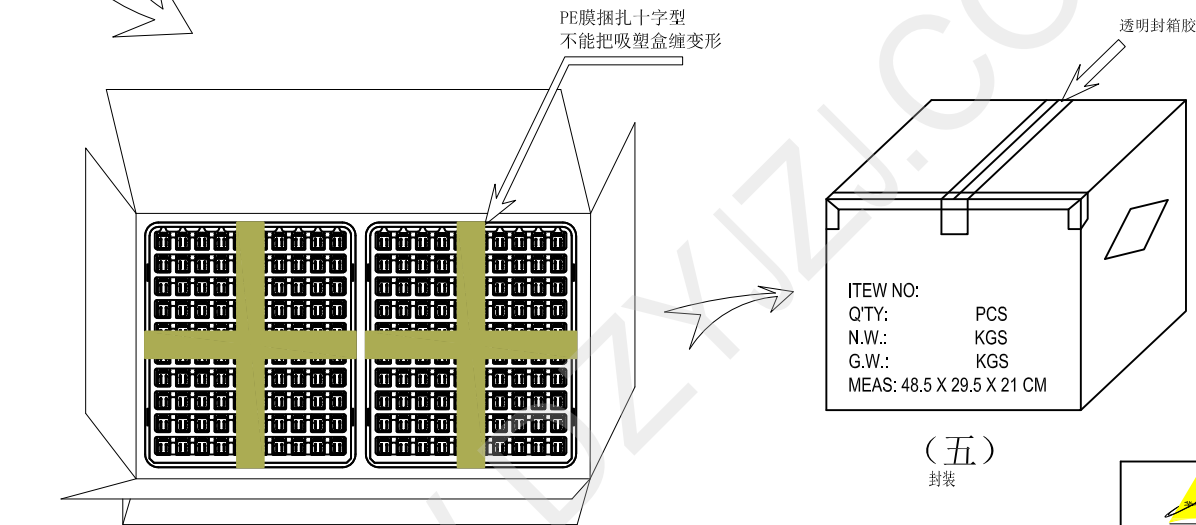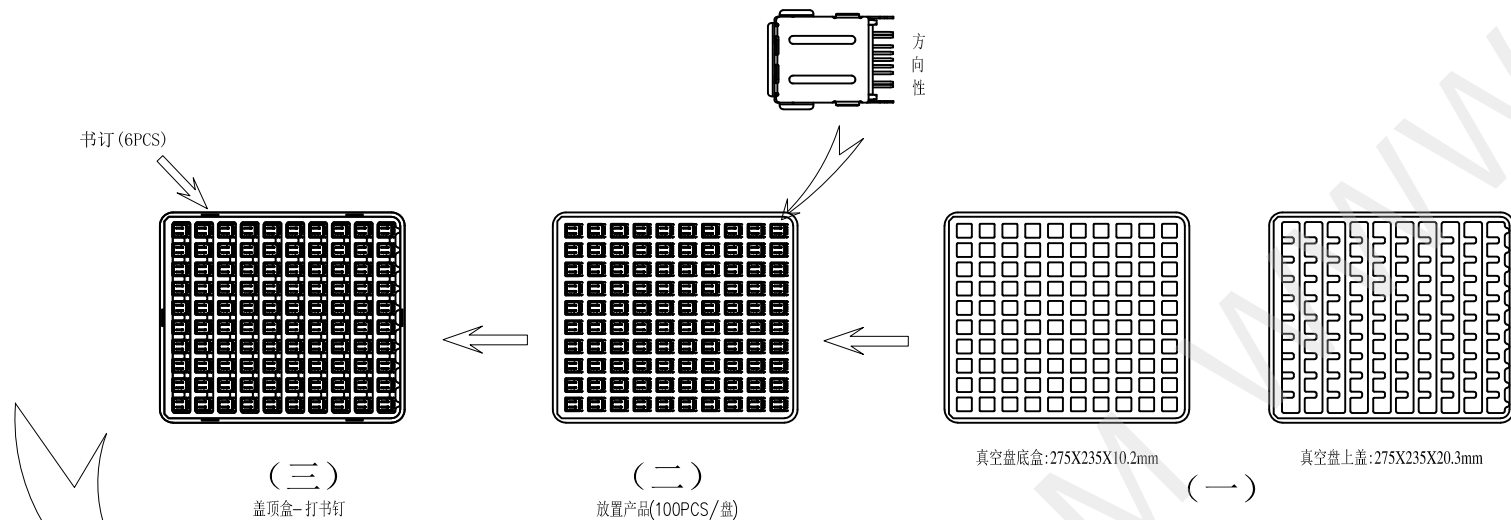


- 包装注意事项:
1. 每10叠真空盘需用PE膜作十字型捆扎;
 2. 每箱需放入适量干燥剂;
 3. 产品标签上需标明产品品名和料号, 及数量;
 4. 尾数箱请将内部多余的空间用于干燥物填满, 并在产品标签上标明尾数箱;

100	2000
PCS/真空盒	PCS/外箱

(四)

10盘一叠, 用PE膜捆扎紧, 装入外箱
左右各一捆, 一共20盘。
外箱规格: 485X295X210mm



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	SHEET NO. 1 OF 1