

MATERIALS

- HOUSING : LCP, UL 94V-0, BLACK.
- TERMINAL : C2680, T=0.20mm,
PLATING : GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
- SHELL : STAINLESS STEEL, T=0.30mm,
PLATING : 50u" NICKEL MIN PLATING.






SPECIFICATION

- CURRENT RATING : 0.5 A. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
- INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- INSERTION FORCE : 4.5Kgf MAX.
- WITHDRAWING FORCE : 1Kgf ~ 4Kgf.
- DURABILITY : 10000 CYCLES.
- SOLDERING HEAT RESISTANCE REFLOW SOLDERING
260°C/5sec.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI2.1 A TYPE SMT 弹片加高翻边 有卡点
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. : HVC175-HDMI A19-108
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. : DRAW NO. : HVC-2606161109
			SHEET NO. : 1 OF 1

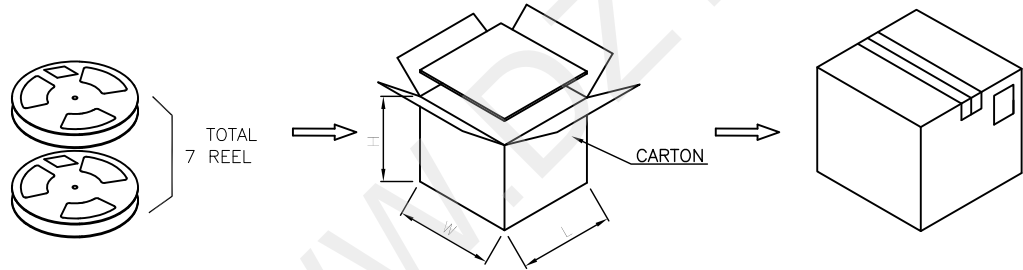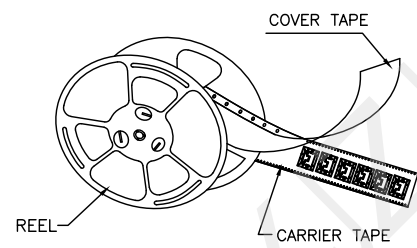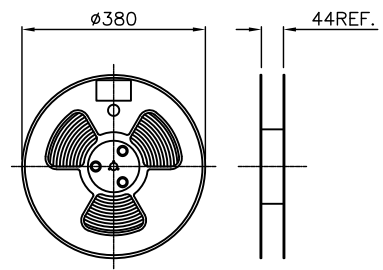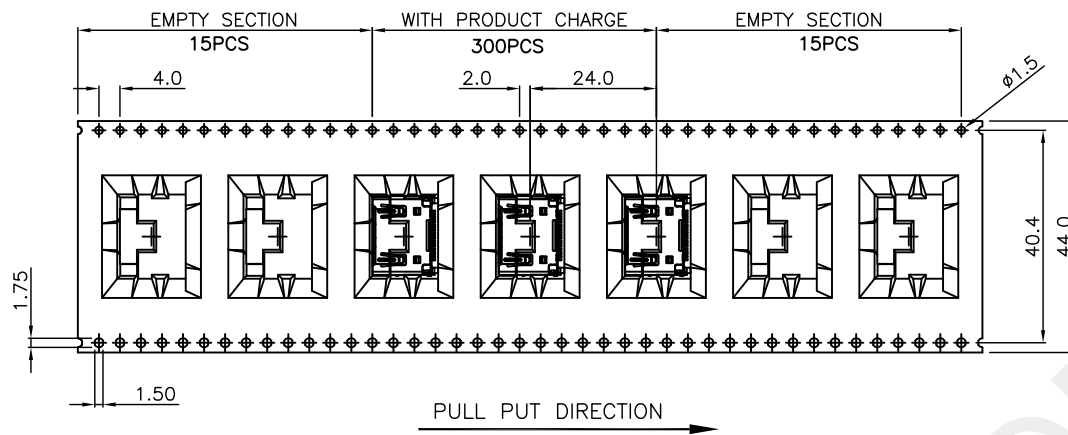

**TAPE & REEL PACKAGE :
SIZE**



- 1. REEL : $\varnothing 380 \times 44$ mm
- CARTON : L=400mm, W=400mm, H=380mm

QUANTITY

- 1. 300 PCS PER REEL.
- 2. 7 REEL PER CARTON (2100 PCS PER CARTON).

MATERIALS

- 1. CARRIER TAPE: POLYSTYREN (PS)
- 2. COVER TAPE: POLYSTYREN (PS)
- 3. REEL: POLYSTYREN (PS)
- 4. APPLICABLE DOCUMENTS : EIA-481-C

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO:
			SHEET NO. 1 OF 1