

Dimension antitheses list				
ITEM	PA	PB	W	L
Alternate	6.00	3.20	7.50	11.00

## SPECIFICATIONS

Current Rating: 3 AMP

Insulator Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.


Withstanding Voltage: AC 500V

Operating Temperature: -40°C to +105°C

Max Processing Temp: 230° -260° for 30-60 seconds

Insulator: Glass filled PA6T (UL94V-0), Black

Contacts: Brass

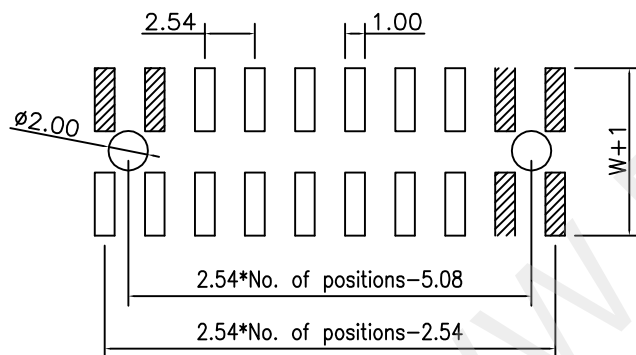

PCB LAYOUT



深圳市华宇创精密电子有限公司

<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	<b>DRAWN BY :</b> 陈一鸣	<b>DATE :</b> 2014-02-23	<b>PART NAME:</b> 2.54PH 2.5H 2XNpin PA6.0 PB3.2 L11.0立贴
	<b>CHECKED BY:</b> 马跃	<b>DATE :</b> 2014-02-23	<b>PART NO.</b> HYC-25M254-2XX-1100(D)
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	<b>APPROVED BY:</b> 邱敏	<b>DATE :</b> 2014-02-23	<b>DRAW NO:</b> HYC-2606261046
			<b>SHEET NO.</b> 1 OF 1