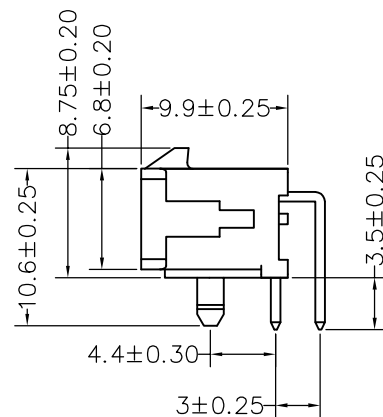
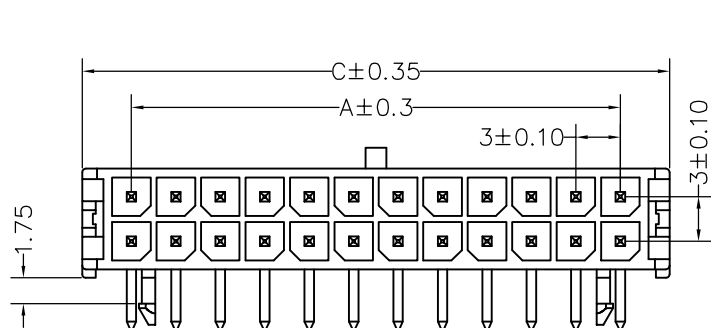


Dimensional Information:

Poles	Part NO.	Dimensions mm		
		A	B	C
2	2X1P		1.15	6.7
4	2X2P	3.0	1.15	9.7
6	2X3P	6.0	1.15	12.7
8	2X4P	9.0	5.8	15.7
10	2X5P	12.0	8.8	18.7
12	2X6P	15.0	11.8	21.7
14	2X7P	18.0	14.8	24.7
16	2X8P	21.0	17.8	27.7
18	2X9P	24.0	20.8	30.7
20	2X10P	27.0	23.8	33.7
22	2X11P	30.0	26.8	36.7
24	2X12P	33.0	29.8	39.7


P. C. B LAYOUT

SPECIFICATIONS

- 1.极数 Poles: 2X1P/2X12P
- 2.额定电流 Current rating: 5.0A AC,DC
- 3.额定电压 Voltage rating: 250V AC,DC
- 4.温度范围 Temperature range: -40°C to +105°C
- 5.接触电阻 Contact resistance: $\leq 20\text{m}\Omega$
- 6.绝缘电阻 Insulation resistance: $\geq 1000\text{m}\Omega$
- 7.耐电压 Withstand voltage: 1500V AC/minute
- 8.适用线规 Applicable wire: AWG #18 to #26
- 9.适用基板厚度 Applicable PC board thickness: 0.8mm to 2.0mm
- 10.材质 The material: Base: PA10T-UL94-V0 HF
Pin针: Brass (C2680)
- 11.表面处理 (Surface treatment): PIN针/SOLDER镀镍 $20\mu\text{m}$ ~ $50\mu\text{m}$: 镀亮锡 $80\mu\text{m}$ ~ $120\mu\text{m}$.
Ni cked more than $20\mu\text{m}$ ~ $50\mu\text{m}$, Bright tin plating $80\mu\text{m}$ ~ $120\mu\text{m}$.



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	C3004 双排弯针	
X.XX ±0.25					
X.XXX ±0.15		CHECKED BY:	DATE :	PART NO.	HYC60-2XNAW-300
X.* ±2* X.X* ±0.5*		马跃	2014-02-23	MOLD NO.	
				APPROVED BY:	DATE :
UNIT: mm [inch]		邱敏	2014-02-23	SHEET NO.	1 OF 1
SCALE:1:1	SIZE: A4				