
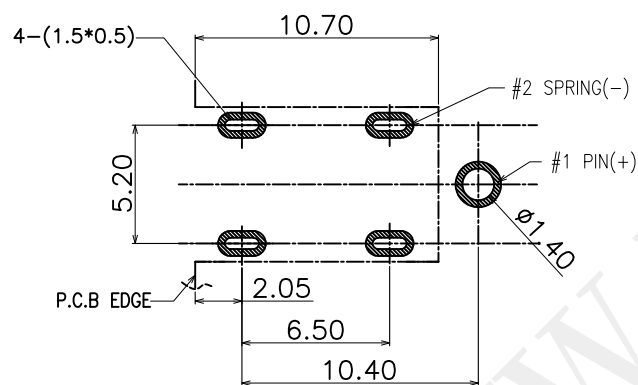

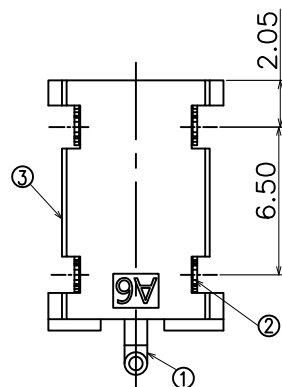


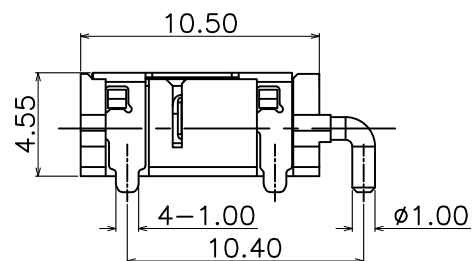
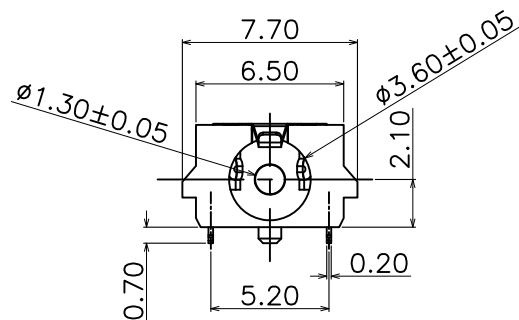
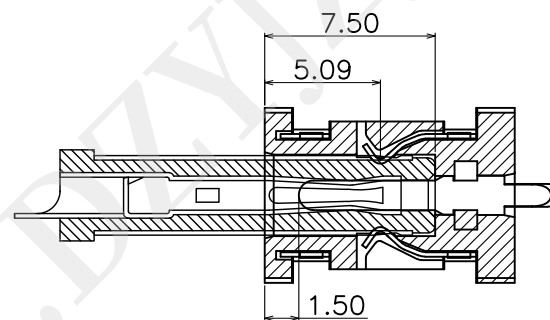


PCB LAYOUT
TOLERANCE: ±0.05

DC JACK INSERT DEPTH

NOTES

1. CURRENT RATING: 24V 3A.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500V AC MIN.
5. DURABILITY: 5000 CYCLES MIN.
6. CONNECTOR MATING FORCES: 3~30N.
7. CONNECTOR UNMATING FORCES: 3~30N.
8. OPERATING TEMPERATURE: -25°C TO +85°C.

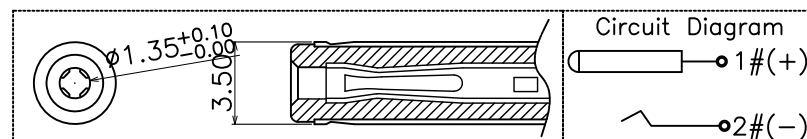

③	HOUSING	1	HIGH TEMPERATURE PLASTICS; BLACK
②	SHELL	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD PLATING WHOLE
①	CENTER PIN	1	BRASS; NICKEL UNDERPLATING OVERALL, GOLD PLATING WHOLE
ITEM	NAME	Q'TY	DESCRIPTION



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC 座
UNIT: mm [inch]	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC03-DC045AC-130
SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2609031006
			SHEET NO. 1 OF 1