
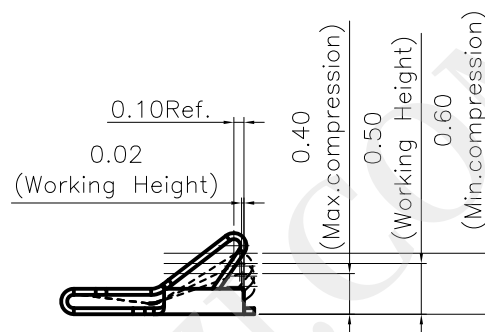
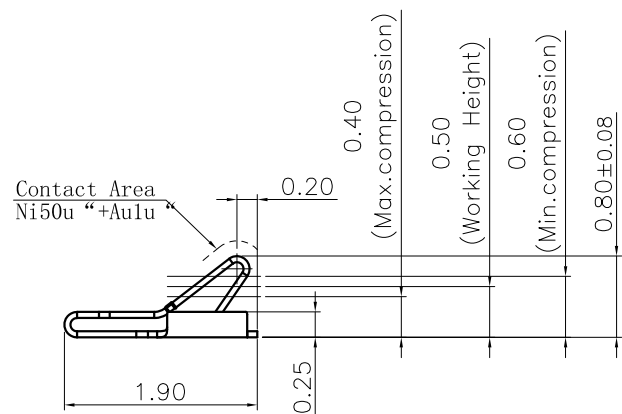
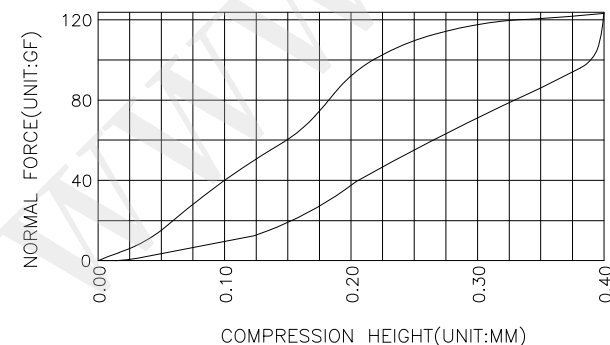




3D VIEW



STATED AT COMPRESSION
(FOR REFERENCE ONLY)RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)METAL MASK T=0.08
TOLERANCE±0.05(钢网推荐图)
(FOR REFERENCE ONLY)

- NOTES:
1:MATERIAL:
1-1:STAINLESS STEEL THICKNE=0.06mm
2:FINISH:
2-1:1u"min Au PLATING ON CONTACT AREA,
1u"min Au PLATING ON SOLDER AREA,
50u"min NICKEL PLATING ON BASE AREA.
3:PRODUCT SPECIFICATIONS:
3-1:RATED CURRENT:1.0A/MAX
3-2:VOLTAGE RATING:1.50V/AC/DC/MAX
3-3:CONTACT RESISTANCE:80mΩ/MAX
3-4:OPERATING TEMPERATURE:-40°C~85°C
3-5:FORCE OF 0.50MM:0.50N MIN ON CONTACT POINT.
3-6:MAX.BEAM DEFLECTION:0.40mm ON CONTACT POINT.
3-7:DURABILITY:1,500 CYCLES.
4:SALT SPRAY:12 HOURS
5:PACKING SPECIFICATION:REEL&TARE
6:DIMENSIONS MARKED ◻,CPK>1.33
7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;
8:COMPLIANT TO RoHS&LEAD FREE




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L1. 90*W1.00*H0.80	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-TXT191008
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2609031646
			SHEET NO.	1 OF 1

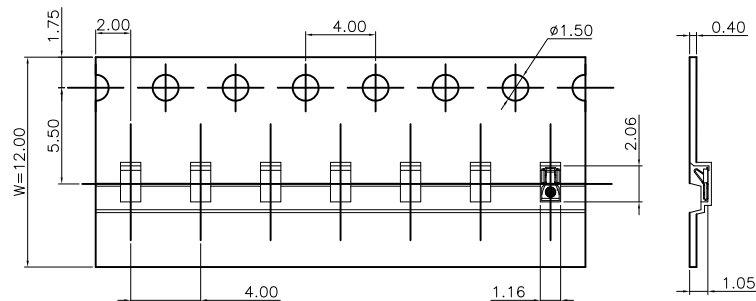

PULL OUT
IN THIS DIRECTION/引出方向

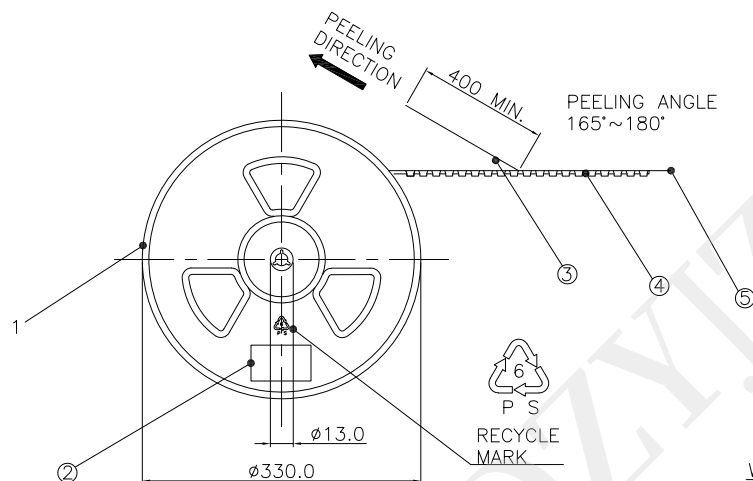

$W \pm 0.40$

TOTAL
20LAYERS

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W9.30
②	1	LABLE	
①	1	ROLLER DISK	$\phi 330$
ITEM	QT'Y	NAME	SIZE



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$ UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1