

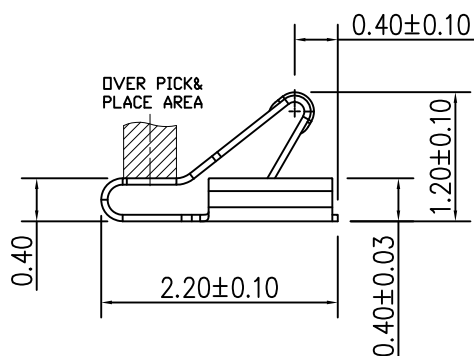
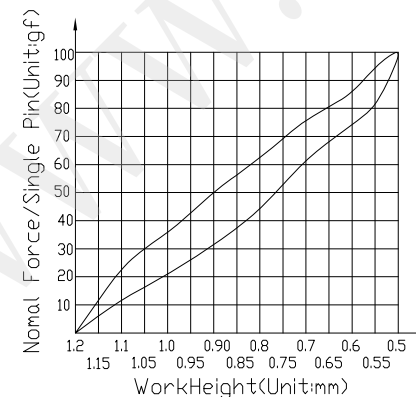




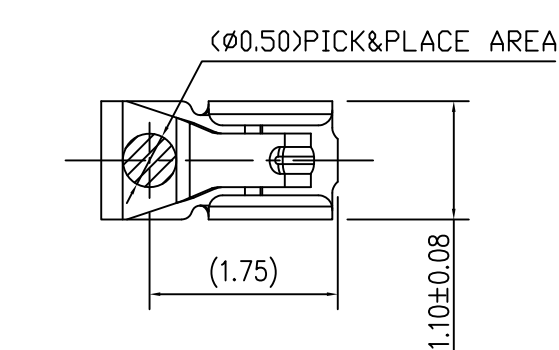

(0.19)Min.compression
(0.17)Working height
(0.14)Max.compression

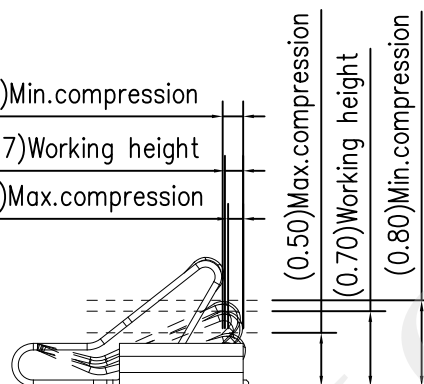

NOTES:

(1) MATERIAL:

1-1:STAINLESS STEEL THICKNE=0.06mm

(2) FINISH:

2-1:3u"min Au PLATING ON CONTACT AREA,
G&F" Au PLATING ON SOLDER AREA,
50~150u" NICKEL UNDER PLATING OVER ALL.

2-2:DIMENSIONS OF PCB PAD STENCIL ARE FOR REFERENCE ONLY,
CUSTOMER CAN MODIFY IT BY THEIR OWN.

(3) PRODUCT SPECIFICATIONS:

3-1:RATED CURRENT:1.0A/MAX
3-2:VOLTAGE RATING:1.50V/AC/DC/MAX
3-3:CONTACT RESISTANCE:50mΩ/MAX
3-4:OPERATING TEMPERATURE:-40°C~85°C
3-5:NORMAL FORCE:0.50~1.00N ON WORKING
3-6:DURABILITY:1,500 CYCLES,


(4):SALT SPRAY:24 HOURS

(5):PACKING SPECIFICATION:REEL&TARE

(6):DIMENSIONS MARKED ,CPK>1.33

(7):ALL DIMENSIONS MARKED MUST BE CONTROLLED BY QC;

(8):COMPLIANT TO RoHS&LEAD FREE

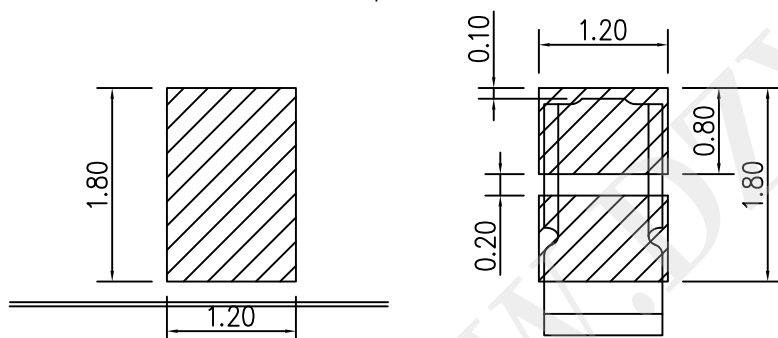

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05 (焊盘推荐图)
(FOR REFERENCE ONLY)

METAL MASK T=0.10
TOLERANCE±0.05 (钢网推荐图)
(FOR REFERENCE ONLY)






深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L2. 20*W1. 10*H1. 20	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT221112A	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031201	
			SHEET NO. 1 OF 1	



CONN. QTY./REEL	REEL QTY./CARTON	CONN. QTY./CARTON
10,000	20	200,000

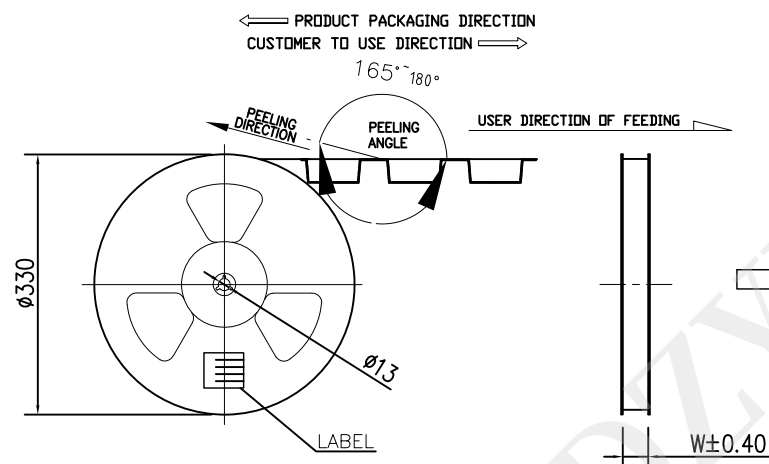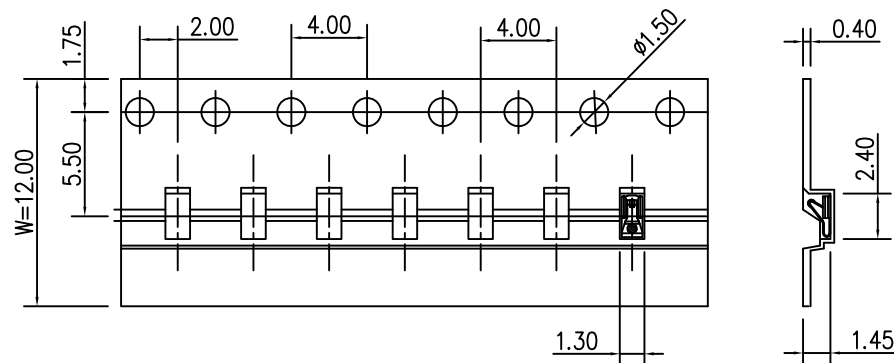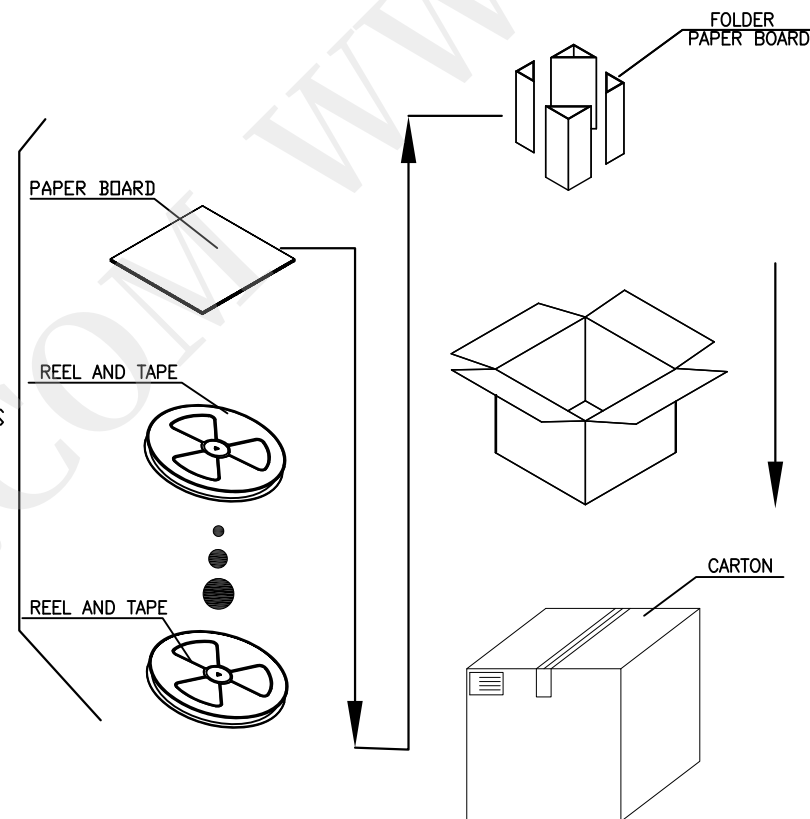TOTAL
20LAYERS

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1