


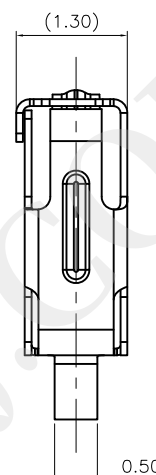
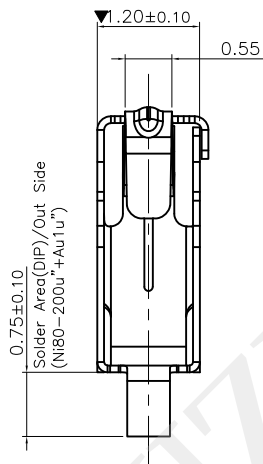


3D VIEW

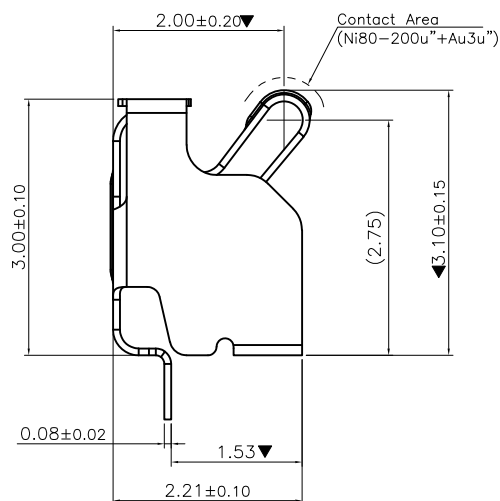

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)



RECOMMENDED METAL MASK
TOLERANCE±0.08(钢网推荐图)
(FOR REFERENCE ONLY)

NOTES:

1:MATERIAL:

1-1:COPPER ALLOY THICKNE=0.08mm

2:FINISH:

2-1:3u\"/>

3:PRODUCT SPECIFICATIONS:

3-1:RATED CURRENT:2.0A/MAX

3-2:VOLTAGE RATING:5.0V/AC/DC/MAX

3-3:CONTACT RESISTANCE:50mΩ/MAX

3-4:WELDING THRUST:≧1.5KG

3-5:OPERATING TEMPERATURE:-40°C~85°C

3-6:NORMAL FORCE OF PRESS@2.40:30±10gf

3-7:DURABILITY:10,000 CYCLES.YIELD NO EXCEED 0.10MM.

4:SALT SPRAY:24 HOURS

5:PACKING SPECIFICATION:REEL&TARE

6:DIMENSIONS MARKED □,CPK>1.33

7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;

8:COMPLIANT TO RoHS&LEAD FREE



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

L2. 21*W1.30*H3.10 充电弹片

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC-TXT2211331TA

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:


HYC-2609040922

SHEET NO.

1 OF 1

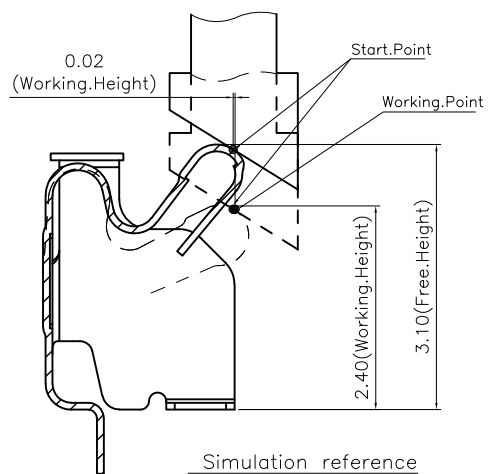

Normal Force@2.40 Compression is 30±10gf After Plating
Normal Force@2.40 Compression is 24±10gf Before Plating

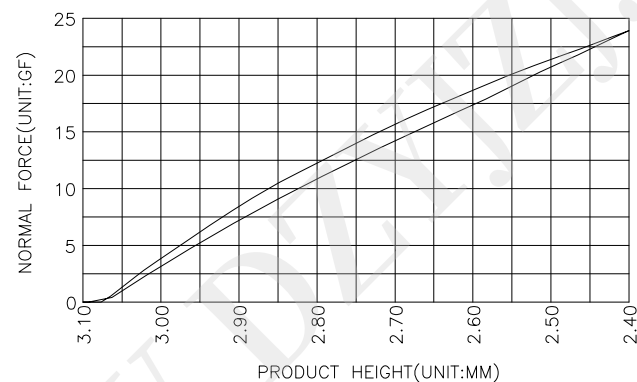

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 21*W1.30*H3.10 充电弹片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT2211331TA	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2609040922	
			SHEET NO. 1 OF 1	