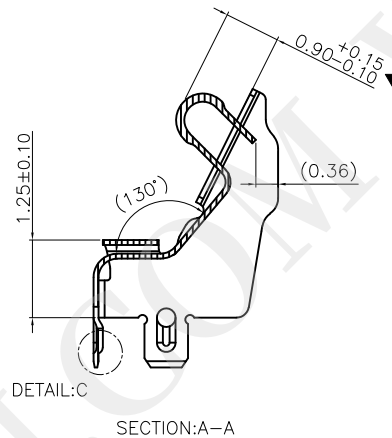
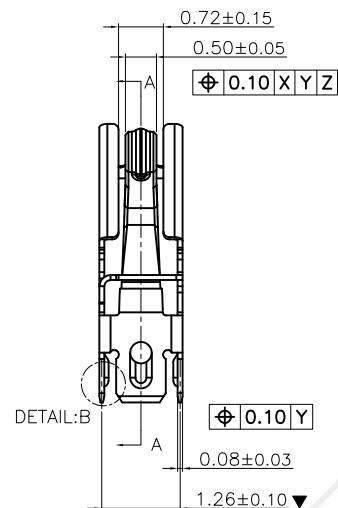
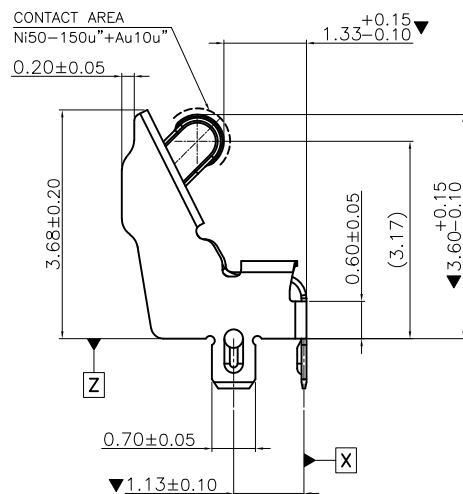



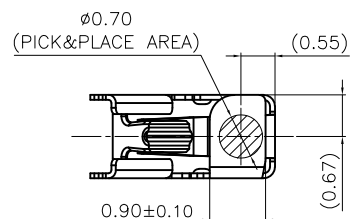


3D VIEW

NOTES:

1) MATERIAL:

1-1: STAINLESS STEEL THICKNE=0.08±0.03mm

2) FINISH:

2-1: 10u\"/>

3) PRODUCT SPECIFICATIONS:


3-1: RATED CURRENT: 1.5A/MAX
3-2: VOLTAGE RATING: 5.0V/AC/DC/MAX
3-3: CONTACT RESISTANCE: 50mΩ/MAX
3-4: DURABILITY: 10,000 CYCLES.

4) SALT SPRAY: 24 HOURS (JUDGED BY ALL OUTSIDE AREA)

5) DIMENSIONS MARKED ■, CPK>1.33

6) ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;

7) COMPLIANT TO RoHS&LEAD FREE

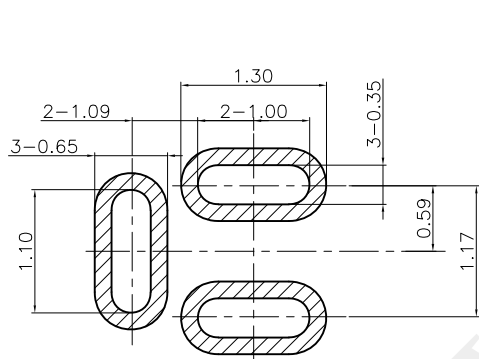


RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 97*W1.34*H3.60mm 立式充电弹片
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT29713436TA
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031139
			SHEET NO. 1 OF 1

耳机插入示意图


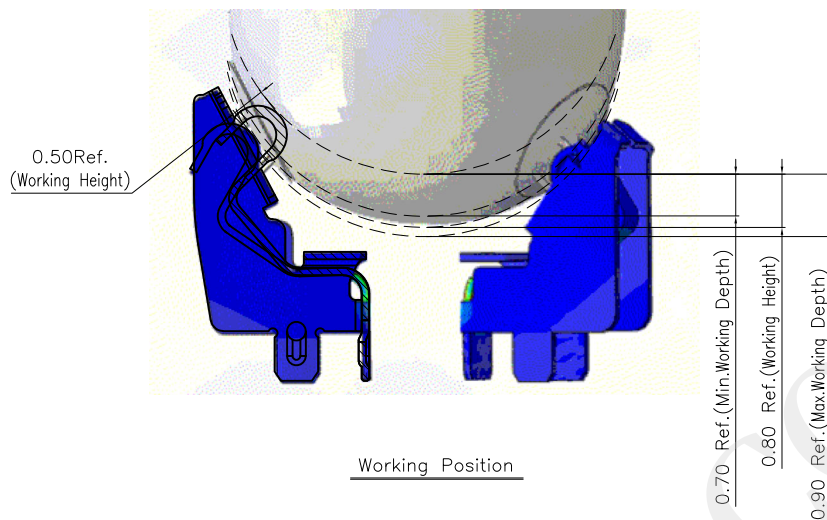


耳机插入力曲线图

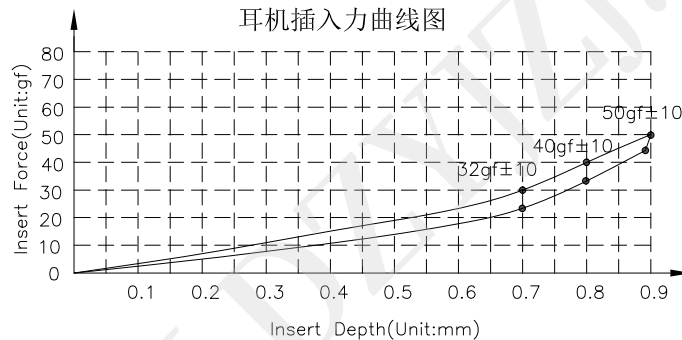


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 97*W1. 34*H3. 60mm立式充电弹片
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT29713436TA
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HVC-2609031139
			SHEET NO. 1 OF 1

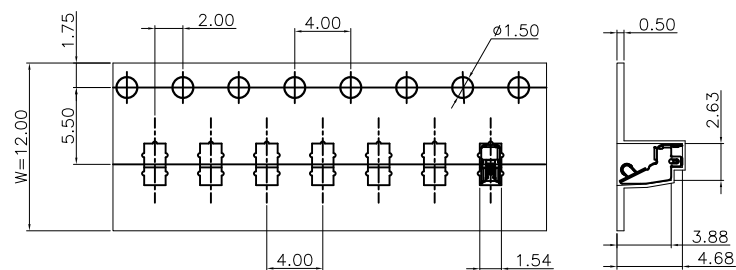

PULL OUT
IN THIS DIRECTION/引出方向

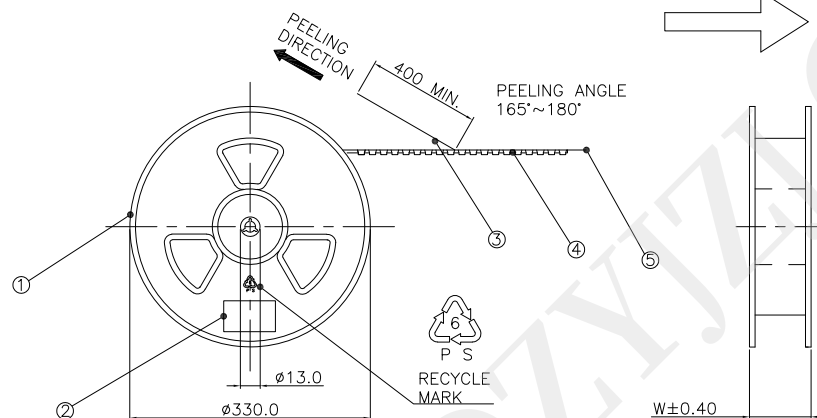

TOTAL
20LAYERS

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W9.30
②	1	LABLE	
①	1	ROLLER DISK	φ330
ITEM	QT*Y	NAME	SIZE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1