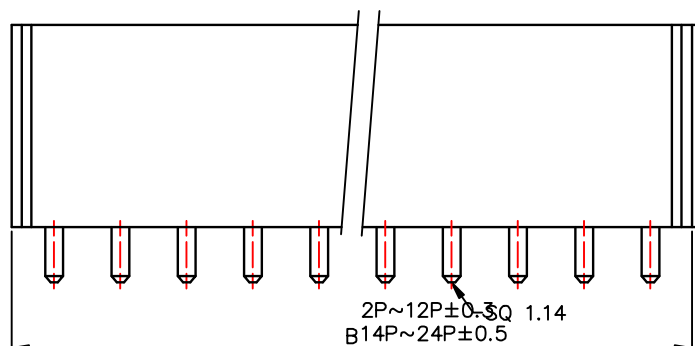
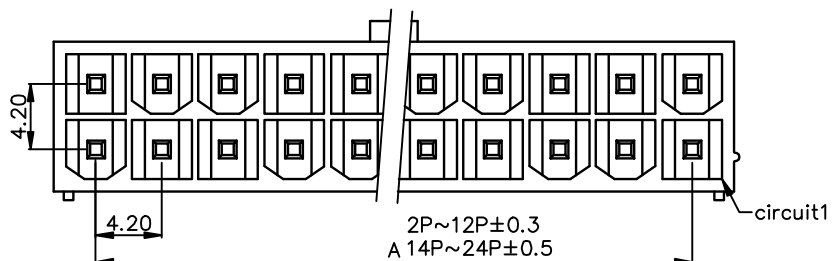


P.C.B. LAUOUT

Dimensions

circuit	A	B	circuit	A	B
2*1	- -	5.40	2*7	25.20	30.60
2*2	4.20	9.60	2*8	29.40	34.80
2*3	8.40	13.80	2*9	33.60	39.00
2*4	12.60	18.00	2*10	37.80	43.20
2*5	16.80	22.20	2*11	42.00	47.40
2*6	21.00	26.40	2*12	46.20	51.60

WAFER(180°)

Material: pin: Brass tin-plated

Base: Nylon66 UL94V-2

Circuits: 2-24circuits available

Insulation resistance: 1000M Ω min


Withstand Voltage: 1500V AC/minute

Current Rating: 9A AC/DC

Voltage Rating: 600V AC/DC



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MX4.2 双排直针 实心PIN	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC300-2XNA-420
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2609011530
				SHEET NO.	1 OF 1