



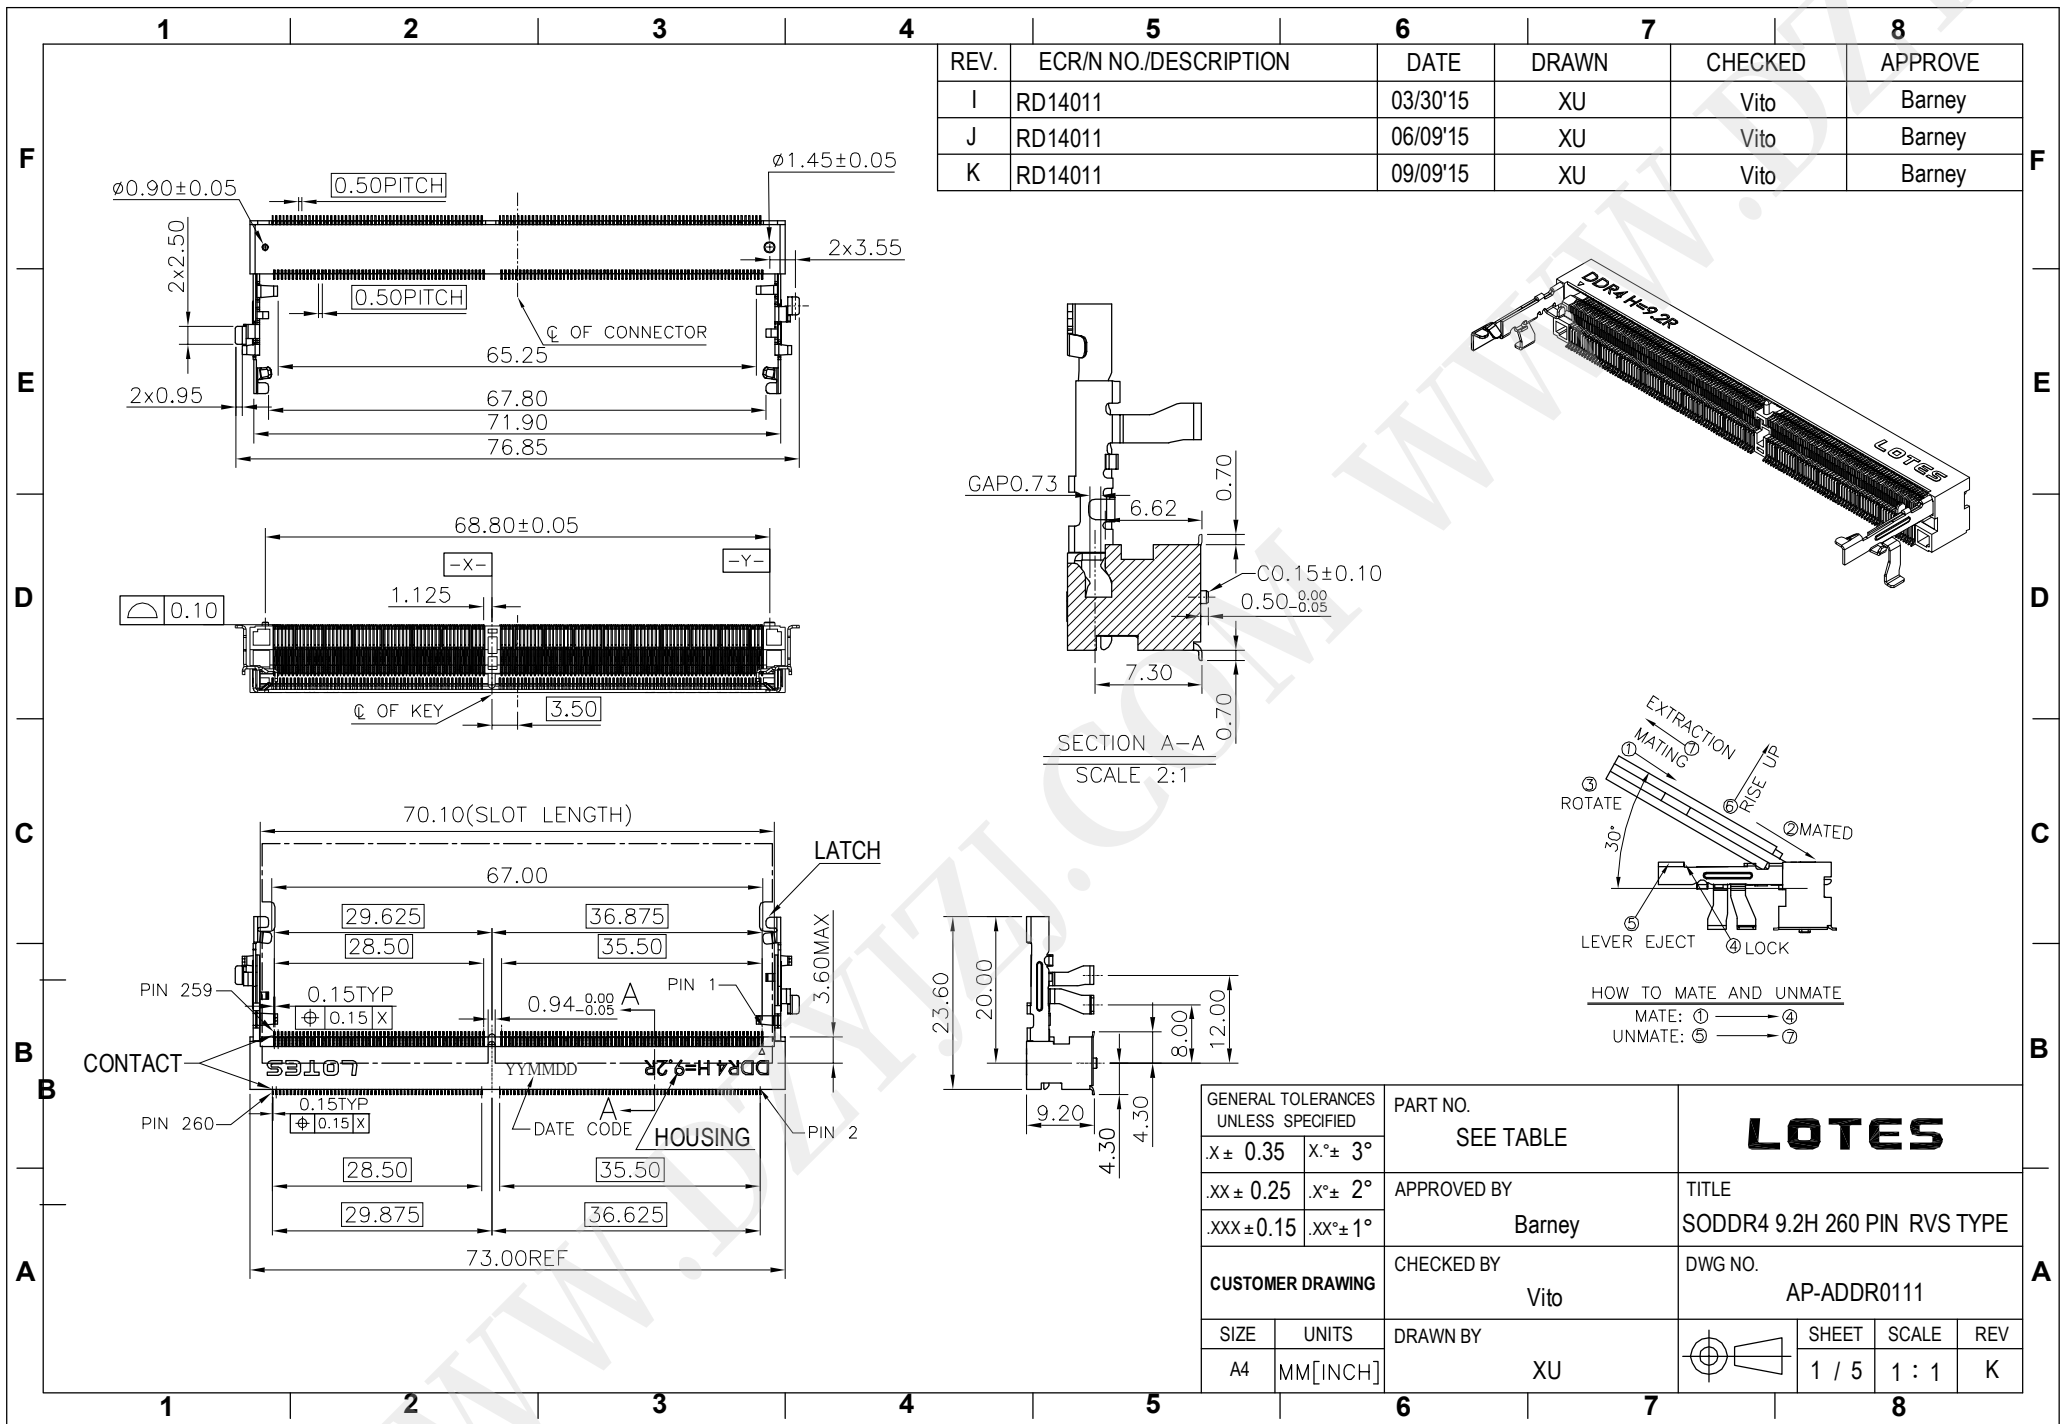


GENERAL TOLERANCES UNLESS SPECIFIED		PAR.T NO.	LOTES			
.X ± 0.35	.X.° ± 3°	SEE TABLE				
.XX ± 0.25	.X.° ± 2°	APPROVED BY	TITLE SODDR4 9.2H 260 PIN RVS TYPE			
.XXX ± 0.15	.XX.° ± 1°	Barney				
CUSTOMER DRAWING		CHECKED BY	DWG NO. AP-ADDR0111			
		Vito				
SIZE	UNITS	DRAWN BY		SHEET	SCALE	REV
A4	MM[INCH]	XU		2 / 5	5 : 4	K

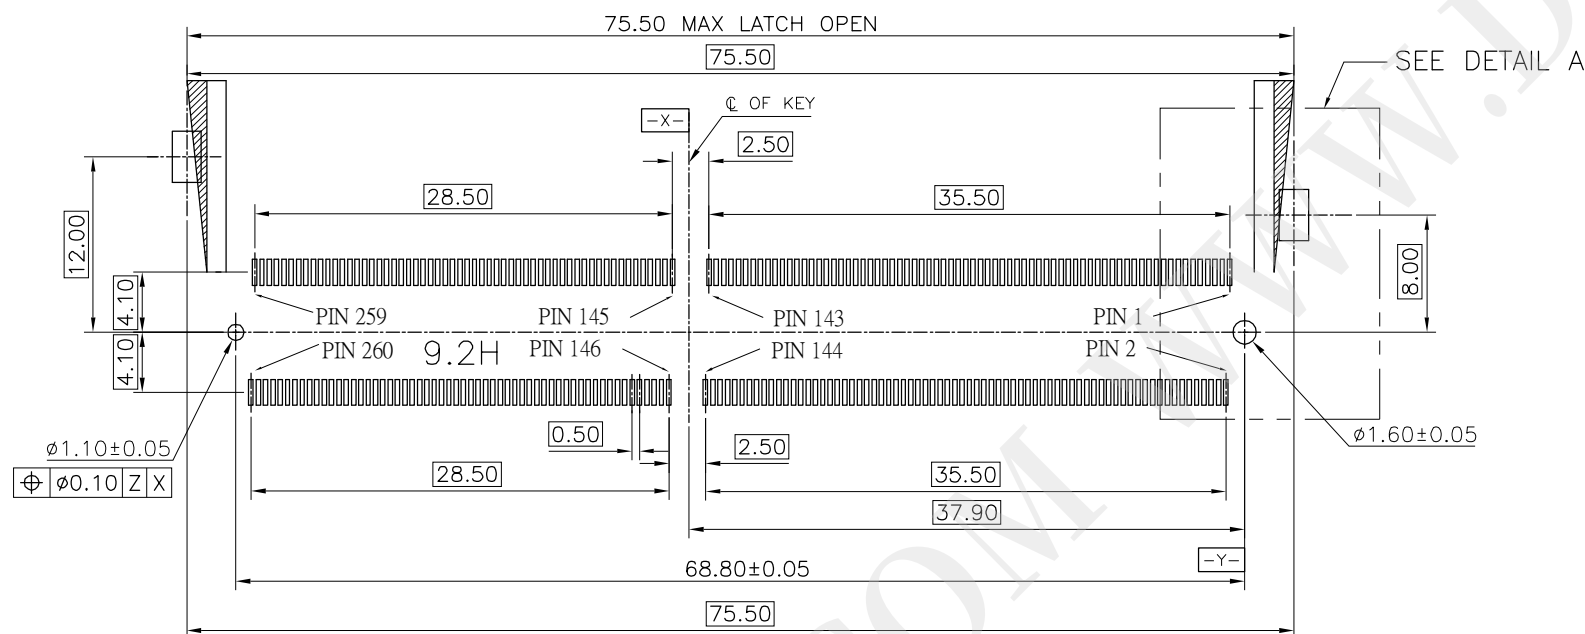



SCALE 2:1

TOP VIEW
RECOMMEND PCB LAYOUT (REVERSE)
THE TOLERANCES UNLESS SPECIFIED IS ± 0.05 MM

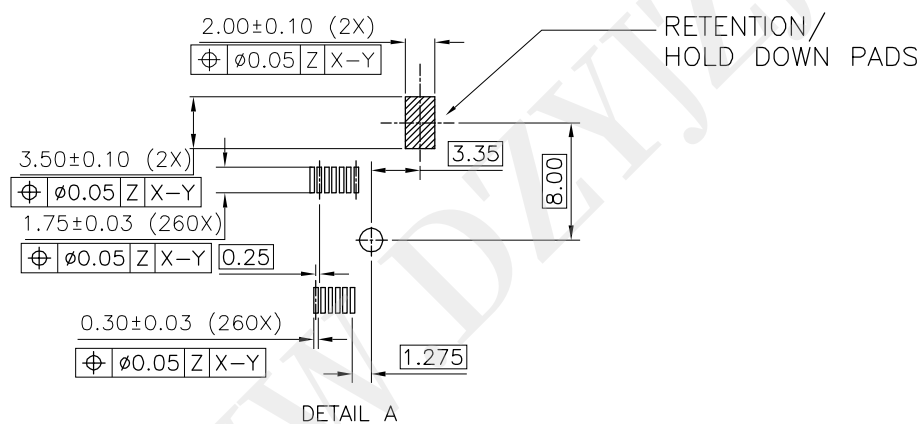

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X $\pm$ 0.35	X° $\pm$ 3°		TITLE SODDR4 9.2H 260 PIN RVS TYPE			
.XX $\pm$ 0.25	.X° $\pm$ 2°	APPROVED BY Barney	DWG NO. AP-ADDR0111			
.XXX $\pm$ 0.15	.XX° $\pm$ 1°					
CUSTOMER DRAWING		CHECKED BY Vito	DRAWN BY XU			
SIZE A4	UNITS MM[INCH]					
				SHEET 3 / 5	SCALE 1 : 1	REV K

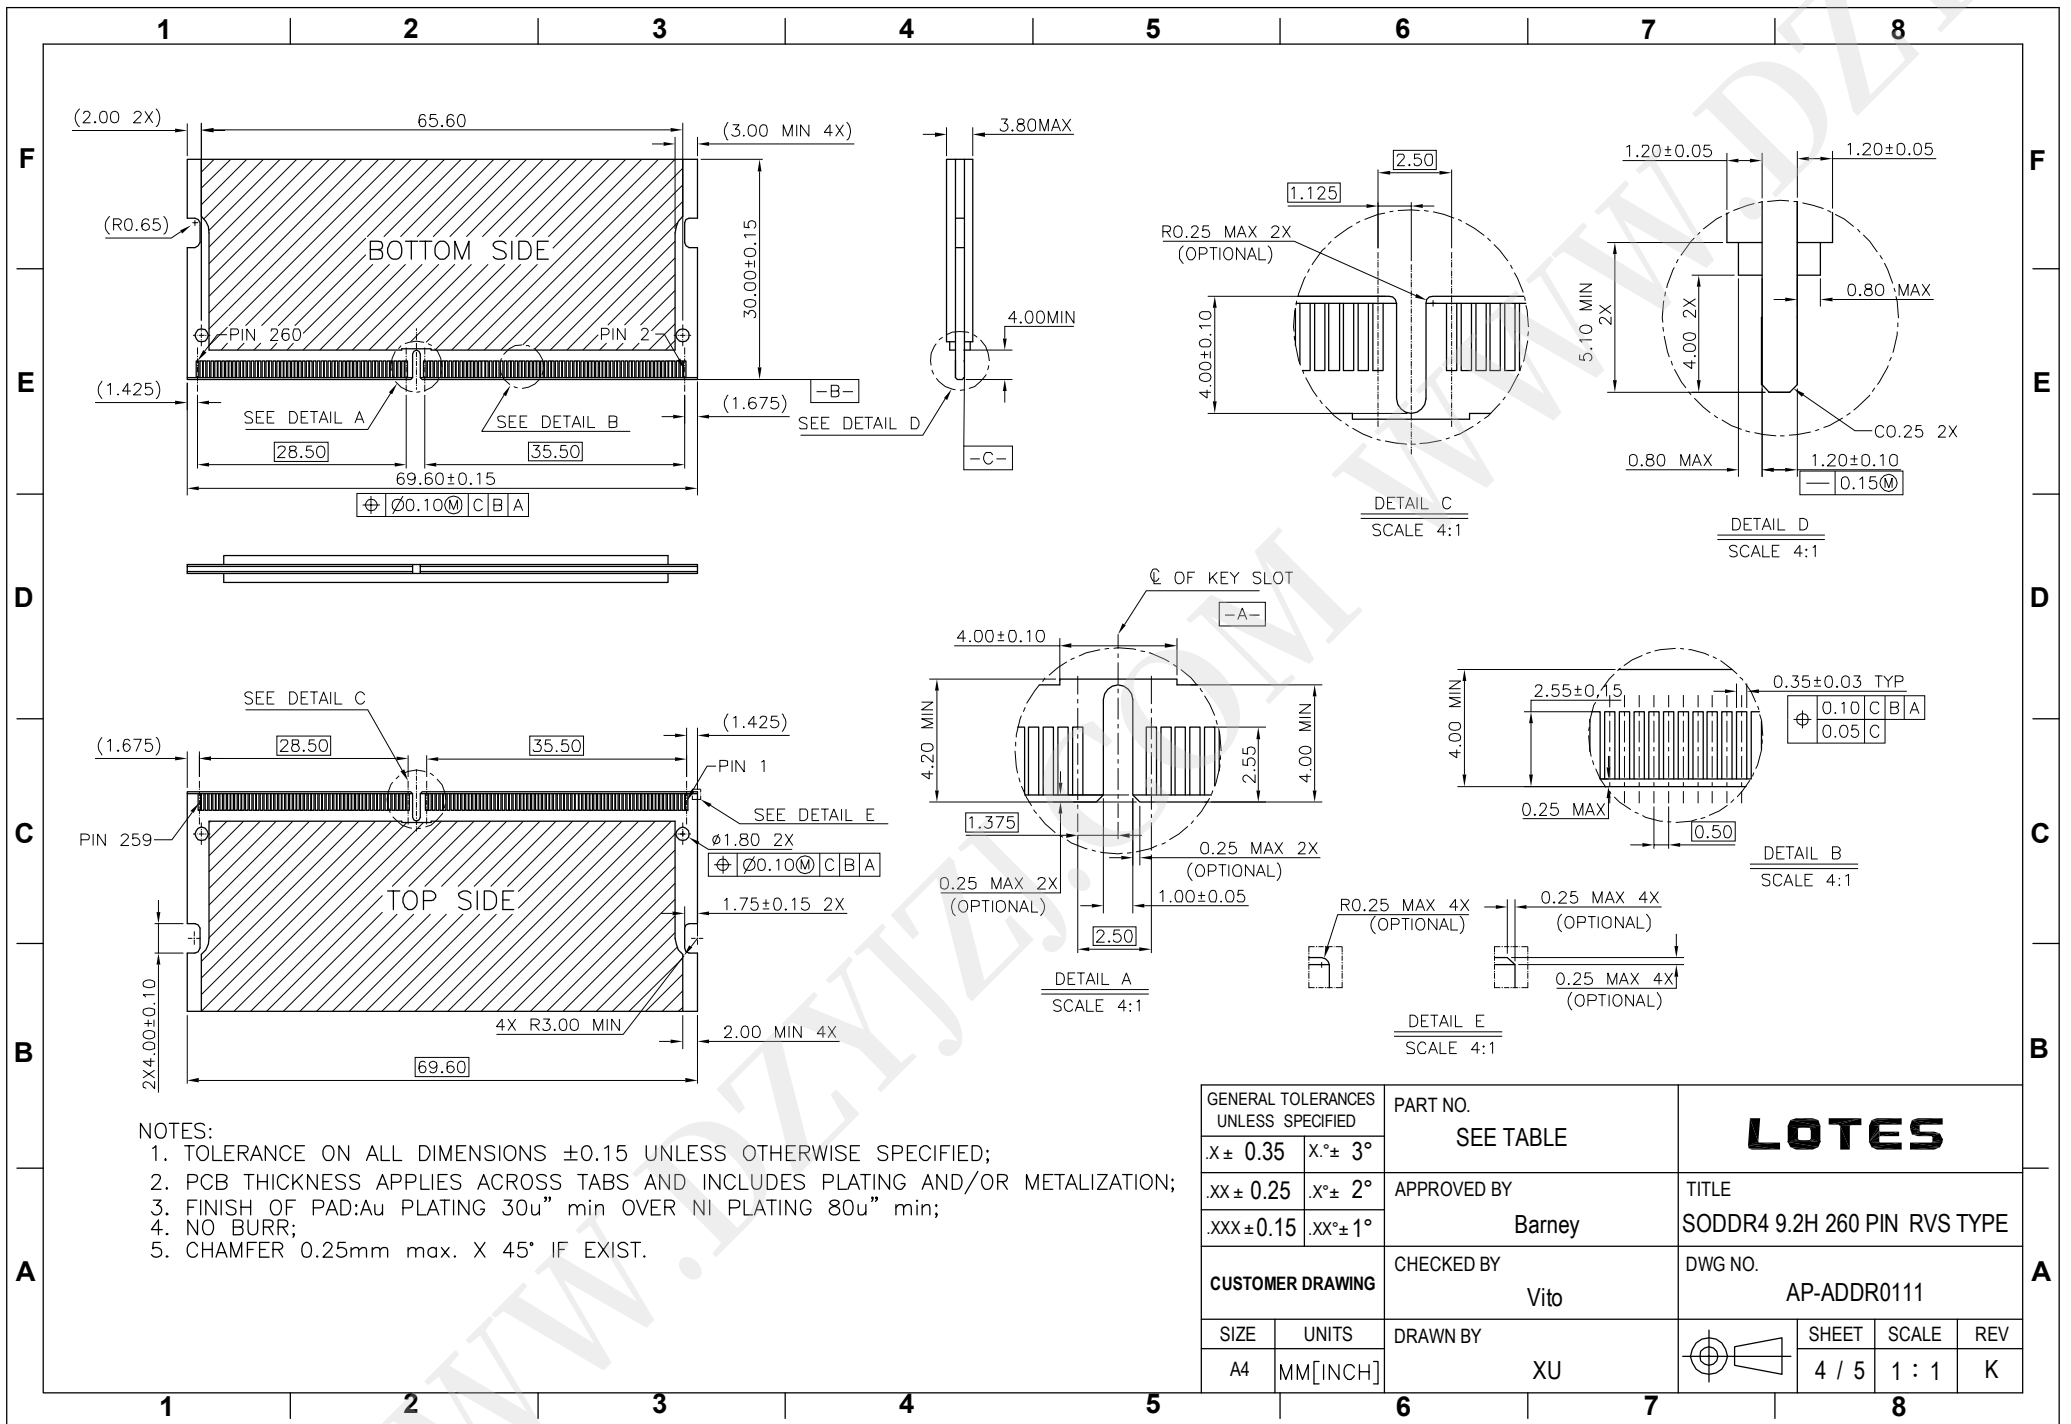

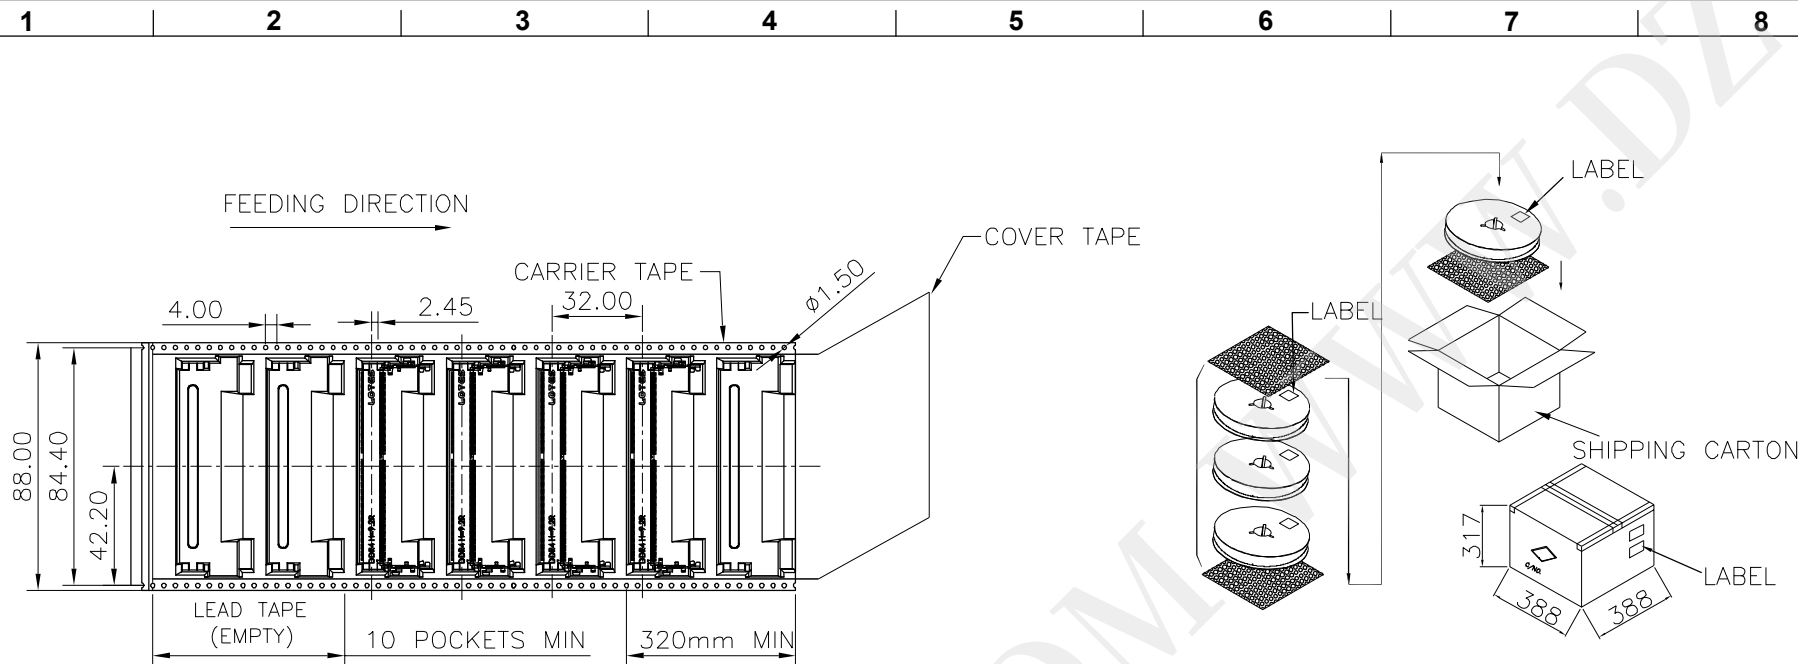

NOTES:

1. MATERIAL :
 - 1.1 CARRY TAPE: PS
 - 1.2 COVER TAPE: PET
 - 1.3 SHIPPING CARTON: CORRUGATED FIBER
2. DIMENSION :
 - 2.1 REEL: W=88.0, $\phi A=380$
 - 2.2 SHIPPING CARTON: L=388, W=388, H=317 (INNER)
3. QUANTITY :
 - 3.1 PRIMARY PACKING: 220 PCS/REEL
 - 3.2 SECONDARY PACKING: 3 REELS/CARTON(660PCS)
4. PEELING RESISTANCE: 20gf~120gf.
5. PEELING SPEED: 300mm/minutes.

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. SEE TABLE	LOTES			
X ± 0.35	X.° ± 3°					
.XX ± 0.25	.X.° ± 2°	APPROVED BY Barney	TITLE SODD4 9.2H 260 PIN RVS TYPE			
.XXX ± 0.15	.XX.° ± 1°					
CUSTOMER DRAWING		CHECKED BY Vito	DWG NO. AP-ADDR0111			
SIZE	UNITS					
A4	MM	DRAWN BY XU		SHEET 5 / 5	SCALE N/A	REV K