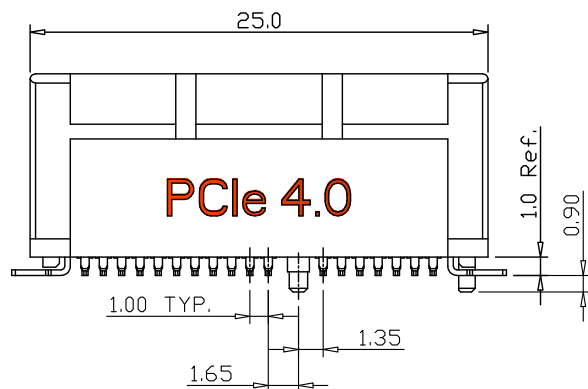
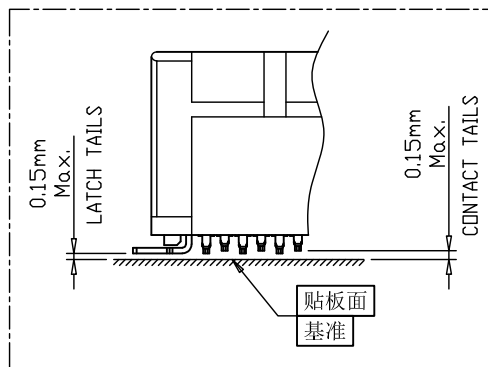
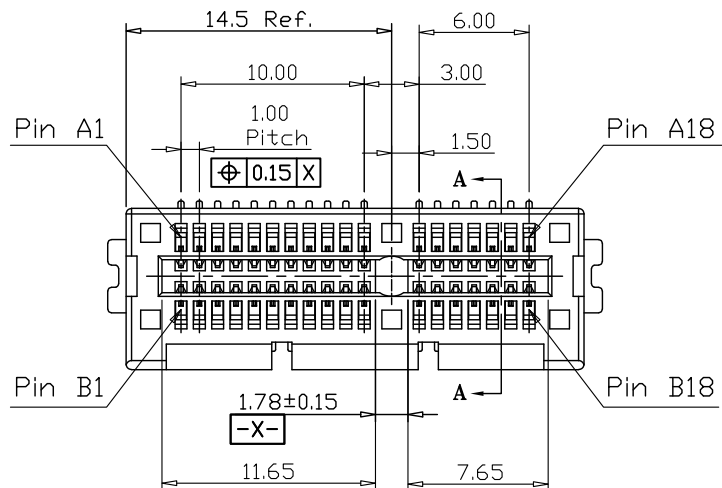


*Material:

- 1.Housing: LCP+30% G/F, UL94V-0,COLOR: BLACK.;
- 2.Terminal: Phosphor Bronze,T=0.25mm;
Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.
- 3.Latch:Brass,T=0.30mm;
80u" Min Tin on solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

*Electrical Characteristics:

- 1:Contact Resistance: 30m Ω Max.
- 2:Insulation Resistance: 1000M Ω Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4:Contact Current rating: 1.1 A Per Pin Min.

*Mechanical Characteristics:


- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3.Durability rating: 50 Cycles

*Operating temperature: -25°C ~ +85°C




深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PCI-E Gen 4.0 36P 立贴带接地片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC57-PCI136-110	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2603051435	SHEET NO. 1 OF 1

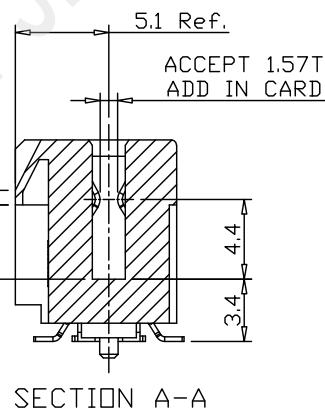




SECTION A-A

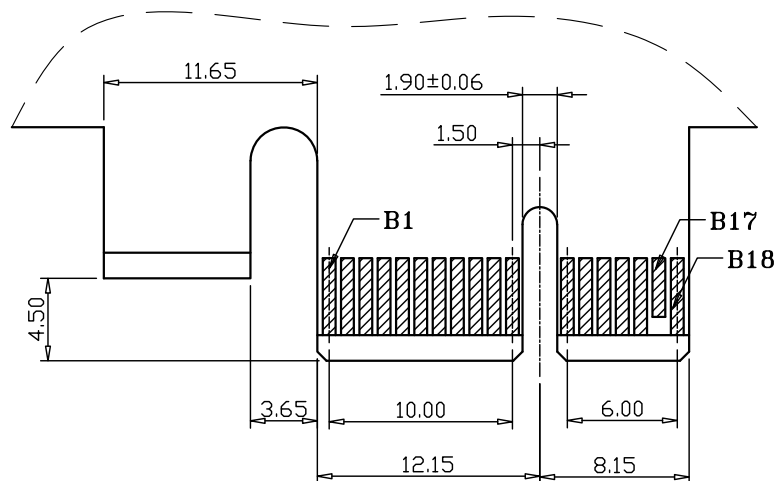

RECOMMENDED EDGE CARD
PATTERN(PRIMARY SIDE)

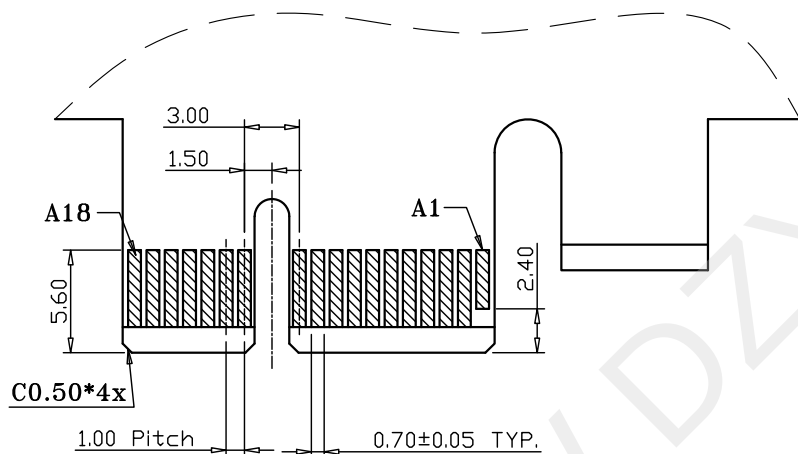


RECOMMENDED EDGE CARD
PATTERN(SECONDARY SIDE)

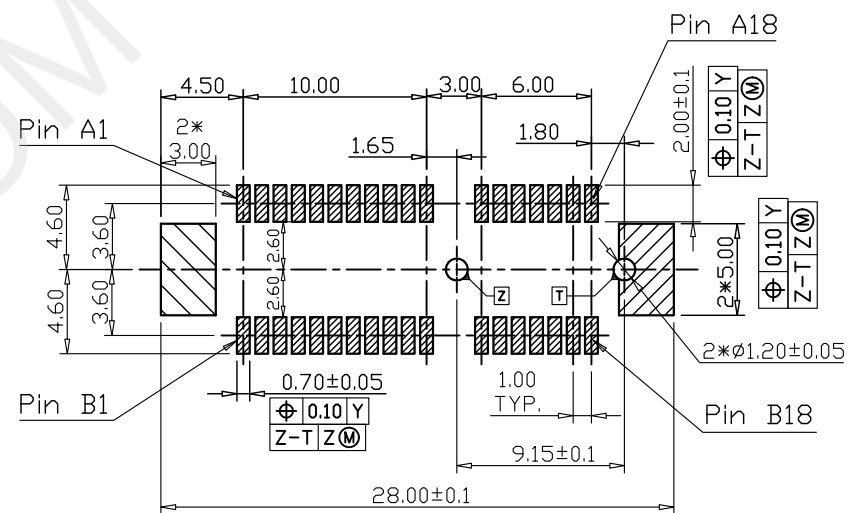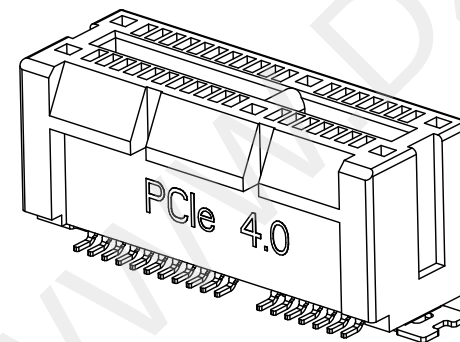
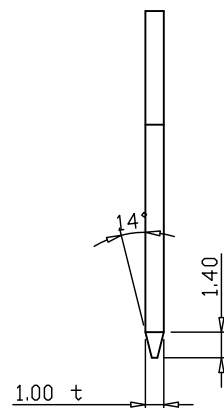


RECOMMENDED PCB LAYOUT
(COMPONENT SIDE) TOLERANCE: ± 0.05





深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*				PCI-E Gen 4.0 36P 立贴带接地片	
		CHECKED BY:	DATE :	PART NO.	HYC57-PC136-110
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HYC-2603051435
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1

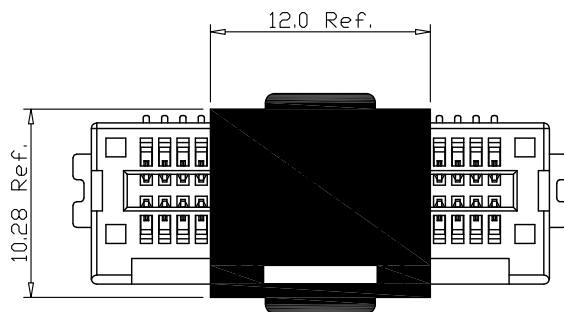

With CAP

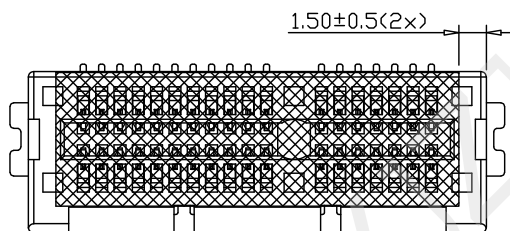

With MYLAR



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X." ±2" X.X" ±0.5"

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

PCI-E Gen 4.0 36P 立贴带接地片

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC57-PCI36-110

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2603051435

SHEET NO.

1 OF 1