




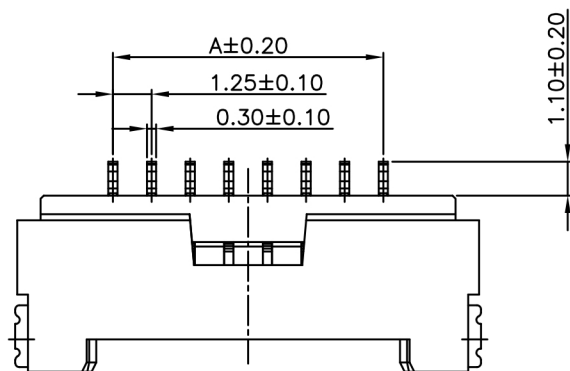



02P-20P

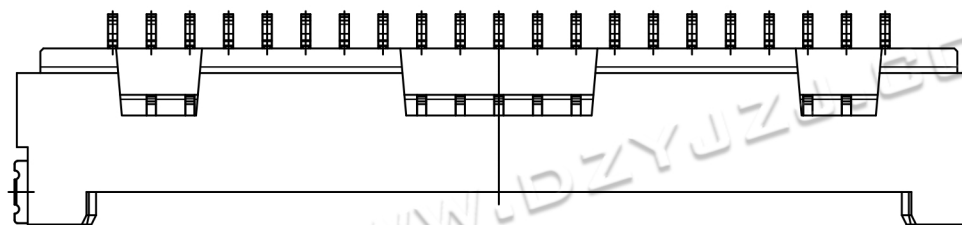

21P-25P

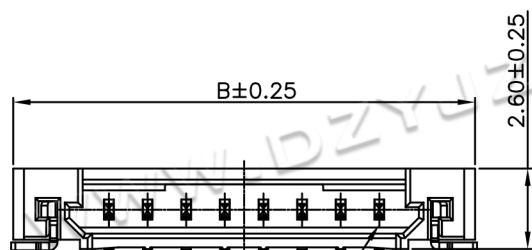

Circuit 1

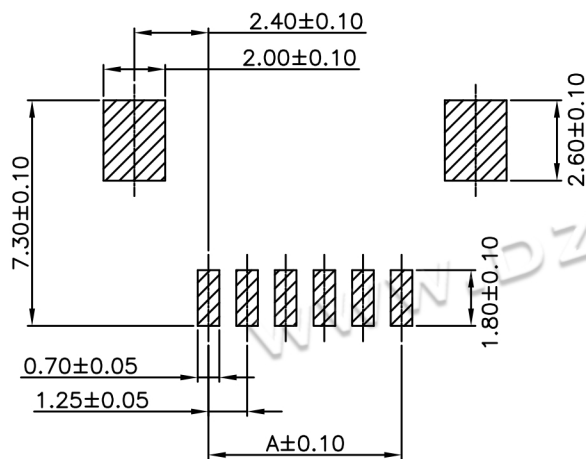

P.C.B. LAYOUT

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
02P	1.25	7.45
03P	2.50	8.70
04P	3.75	9.95
05P	5.00	11.20
06P	6.25	12.45
07P	7.50	13.70
08P	8.75	14.95
09P	10.00	16.20
10P	11.25	17.45
11P	12.50	18.70
12P	13.75	19.95
13P	15.00	21.20
14P	16.25	22.45
15P	17.50	23.70
20P	23.75	29.95
25P	30.00	36.20

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin Plating

Solder Tabs: Brass/Tin Plating

Material: PA6T,UL94V-0

Color: Natural(Beige)




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2° X.X' ±0.5°



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

1. 25P 卧式贴片WAFER

PART NO.

HYC102-WFN-125


MOLD NO.

DRAW NO:

HYC-2503251437

SHEET NO.

1 OF 1

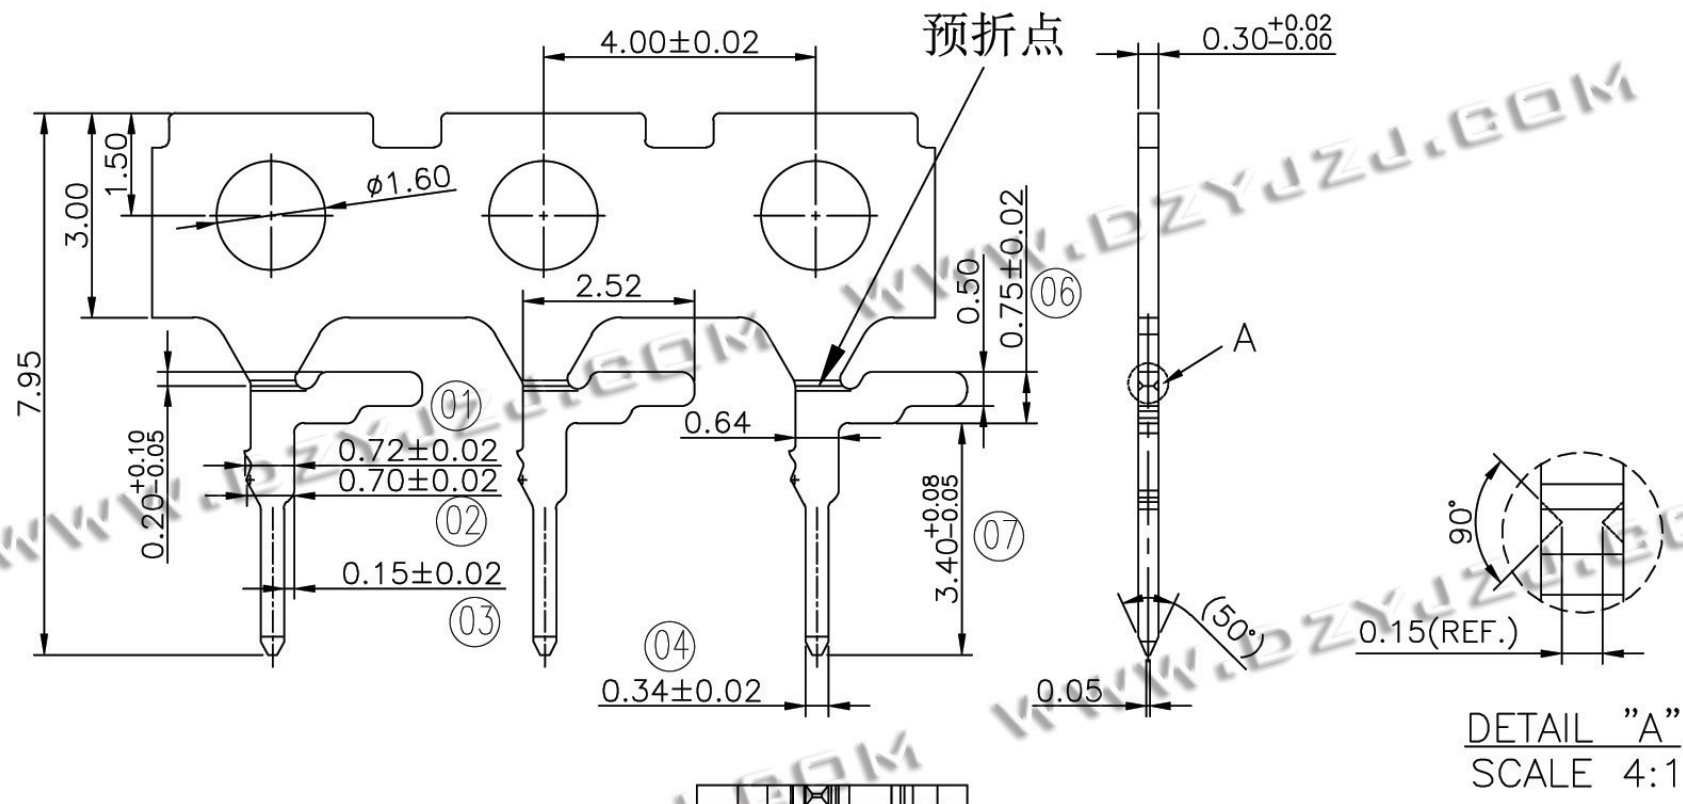

备注:

1. 端子材质: 黄铜: 0.30T
2. 端子表面无压伤, 变形, 沾污等, 毛边不超过0.03.
3. 预折点要求: 料带来回折45度须与产品脱离.
4. 料带弧形1米内不超过10MM.
5. "⊙"标示尺寸为重点管控尺寸;







深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.25PH 端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC102-T-125	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2112011459	SHEET NO. 1 OF 1


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0
Color: Natural(White)

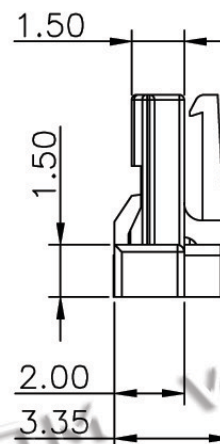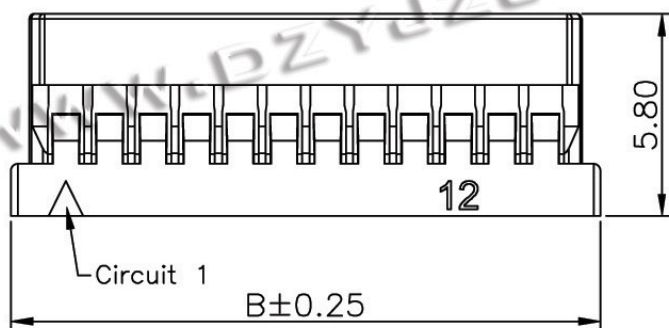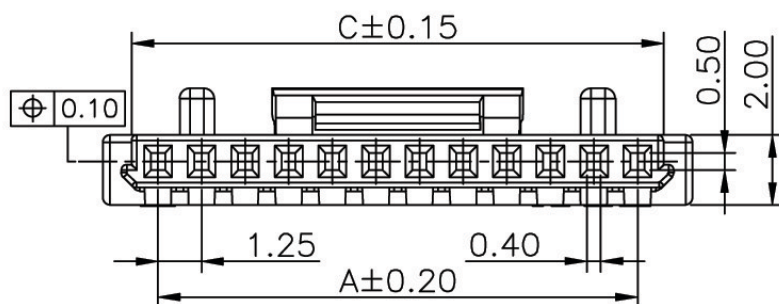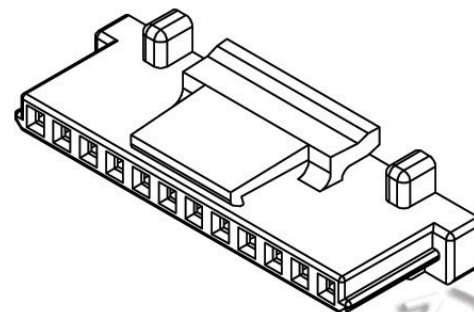


Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
02P	1.25	4.40	2.75
03P	2.50	5.65	4.00
04P	3.75	6.90	5.25
05P	5.00	8.15	6.50
06P	6.25	9.40	7.75
07P	7.50	10.65	9.00
08P	8.75	11.90	10.25
09P	10.00	13.15	11.50
10P	11.25	14.40	12.75
11P	12.50	15.65	14.00
12P	13.75	16.90	15.25
13P	15.00	18.15	16.50
14P	16.25	19.40	17.75
15P	17.50	20.65	19.00
20P	23.75	26.90	25.25
25P	30.00	33.15	31.50
30P	36.25	39.40	37.75

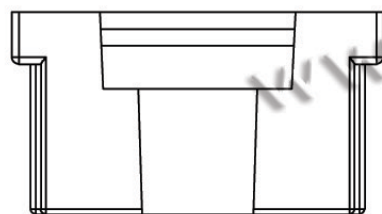

02P~10P

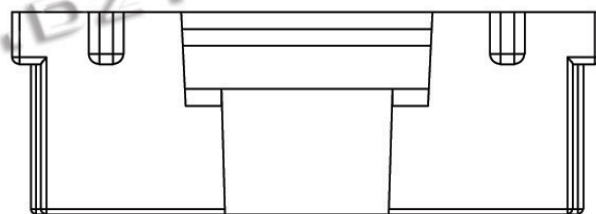

11P~30P




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X" $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

1.25PH 胶壳

CHECKED BY:

马跃

DATE:

2014-02-23

APPROVED BY:

邱敏

DATE:

2014-02-23

PART NO.

HYC102-NY-125

MOLD NO.

DRAW NO:

HYC-2112011457

SHEET NO.

1 OF 1