


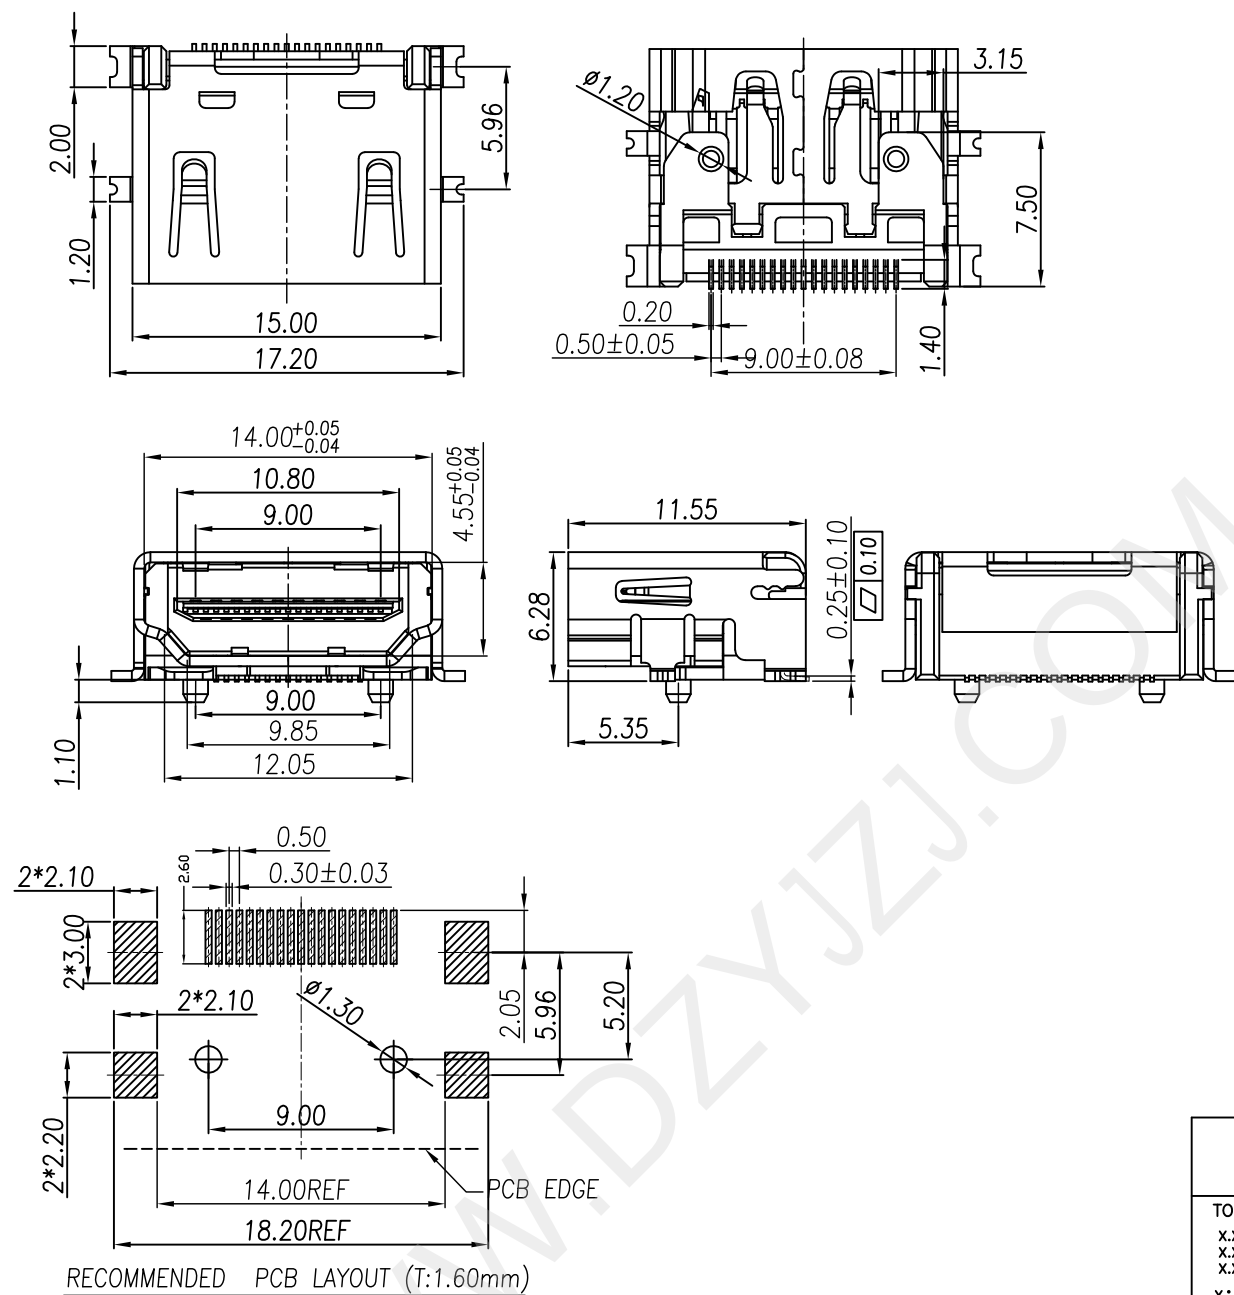

备注:

1) 材质:

1-1 本体:LCP 94V-0 黑色

1-2 端子:青铜 $T=0.20\text{mm}$

1-3 铜壳:青铜或SPCC $T=0.50\text{mm}$

2) 镀层:

2-1端子:所有面镀镍镀, 接点镀金(参照料号编码),
焊脚镀锡100 μ ",

2-2外壳:镀金或镍

3) 技术规格

3-1. 额定电压:40V

3-2. 额定电流:0.5A

3-3. 绝缘电阻:100兆欧最小

3-4. 接触电阻:30豪欧最大

3-5. 操作温度:-20度到85度

3-6. 插入力:44.1牛最大


3-7. 拔出力:9.8牛最小,44.1牛最大

3-8. 耐久:10000次

4) 标“*”的QC重点标制尺寸



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15				HDMI A TYPE 全贴片 双柱间距9.0 1.2柱	
X.* ±2° X.X° ±0.5°		CHECKED BY:	DATE :	PART NO.	HYC143-HDMI A19-120
		马跃	2014-02-23	MOLD NO.	
				APPROVED BY:	DATE :
UNIT: mm [inch]		邱敏	2014-02-23	SHEET NO.	1 OF 1
SCALE:1:1	SIZE: A4				